

# חידושים בהדפסה תלת ממדית תעשייתית: חידושים בהדפסה תלת ממדית תעשייתית:

טכנולוגיות הדפסה, חומרי גלם ועמידות בדרישות פיזיקליות/תקינה



**לשכת המהנדסים - 2020**



**שי אינברג**

מנהל מחלקת מכירות  
תלת-מימד



**זיו שדה**

סנכ"ל שיווק ומכירות



# Who we are

**30 YEARS OF EXPERIENCE**


**PROVIDING SOLUTIONS, NOT MACHINERY**

**TRUSTED BY THE LEADING BRAND**







# OUR DIVISIONS

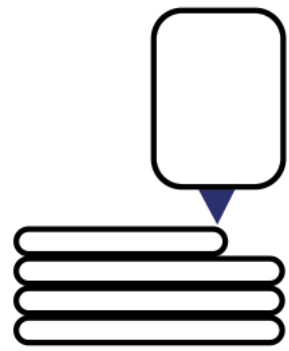


3D  
PRINTERS



ROBOTICS &  
AUTOMATION

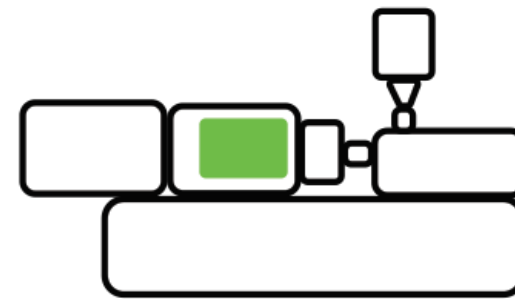

INJECTION MACHINES &  
EQUIPMENT

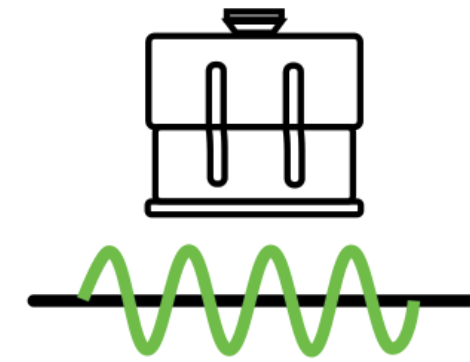


PLASTIC  
WELDING



# OUR RAPID MANUFACTURING SOLUTIONS



PCB

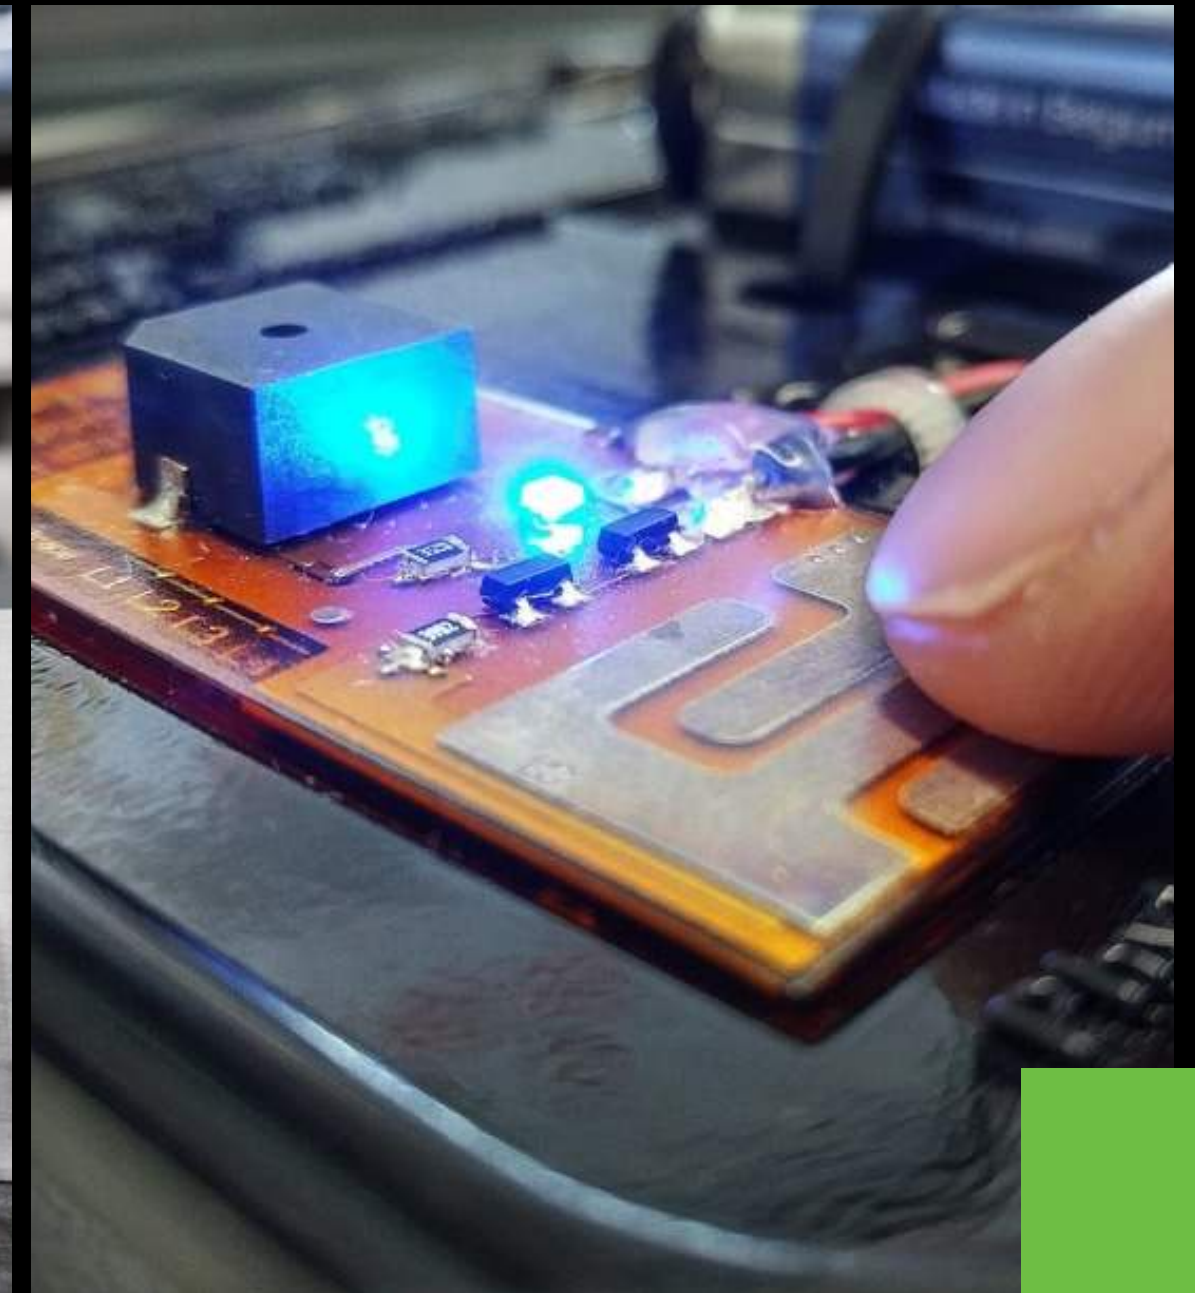



# AGENDA:

Polyemers – multi material printing

Polymers – engineering applications & Material portfolio.

Metal

DesktopMetal BMD – Studio System

Desktopmetal Binderjeting – Shop System

NanoDimension- AMEW



# POLYMER





# stratasys®

## The most widely used Polymer 3D printer in the world

Stratasys, an additive manufacturing pioneer who leads the AM world wide industry. AN Israeli pride

Your paragraph text

**Always innovating.**

**Always inventing.**

**Most widely-used 3D printer**



**\*Represents Stratasys in Israel Since 1995**





# stratasys®



**Ziv Sadeh**

VP Sales and Marketing SU-PAD | Lecturer and specialist in plastic welding, cobots a...  
1mo •

Thank you [Laser Modeling Israel LTD](#) for hosting me yesterday, together with new [Stratasys](#) CEO, [Yoav Zeif](#), and EVP EMEA & APJ, [Guy Yair](#).

...see more



with Yoav Zeif

## ISRAELI BASED



**\*Represents Stratasys in Israel Since 1995**



# STRATASYS TECHNOLOGIES



## FDM

- Thermoplastics
- Functional Prototypes, Tools and Final Parts

## SLA

- UV Cured Resin
- Transperent/ hollow geometries
- part cost

## POLYJET

- Photopolymers
- Material versatility including colors, different shores and clear materials on the same part/tray
- High resolution

**COMING SOON:** HSS, LPM, STEP






# ADDITIVE MANUFACTURING POLYMERS

# ADDITIVE MANUFACTURING FOR POLYMERS



Für alle Verfahren gilt: Durch den schichtweisen selektiven Ablauf entstehen dreidimensionale Strukturen.  
It applies to all processes: three-dimensional structures are created by the selective layer-by-layer process.

# PJ – Polyjet Technology

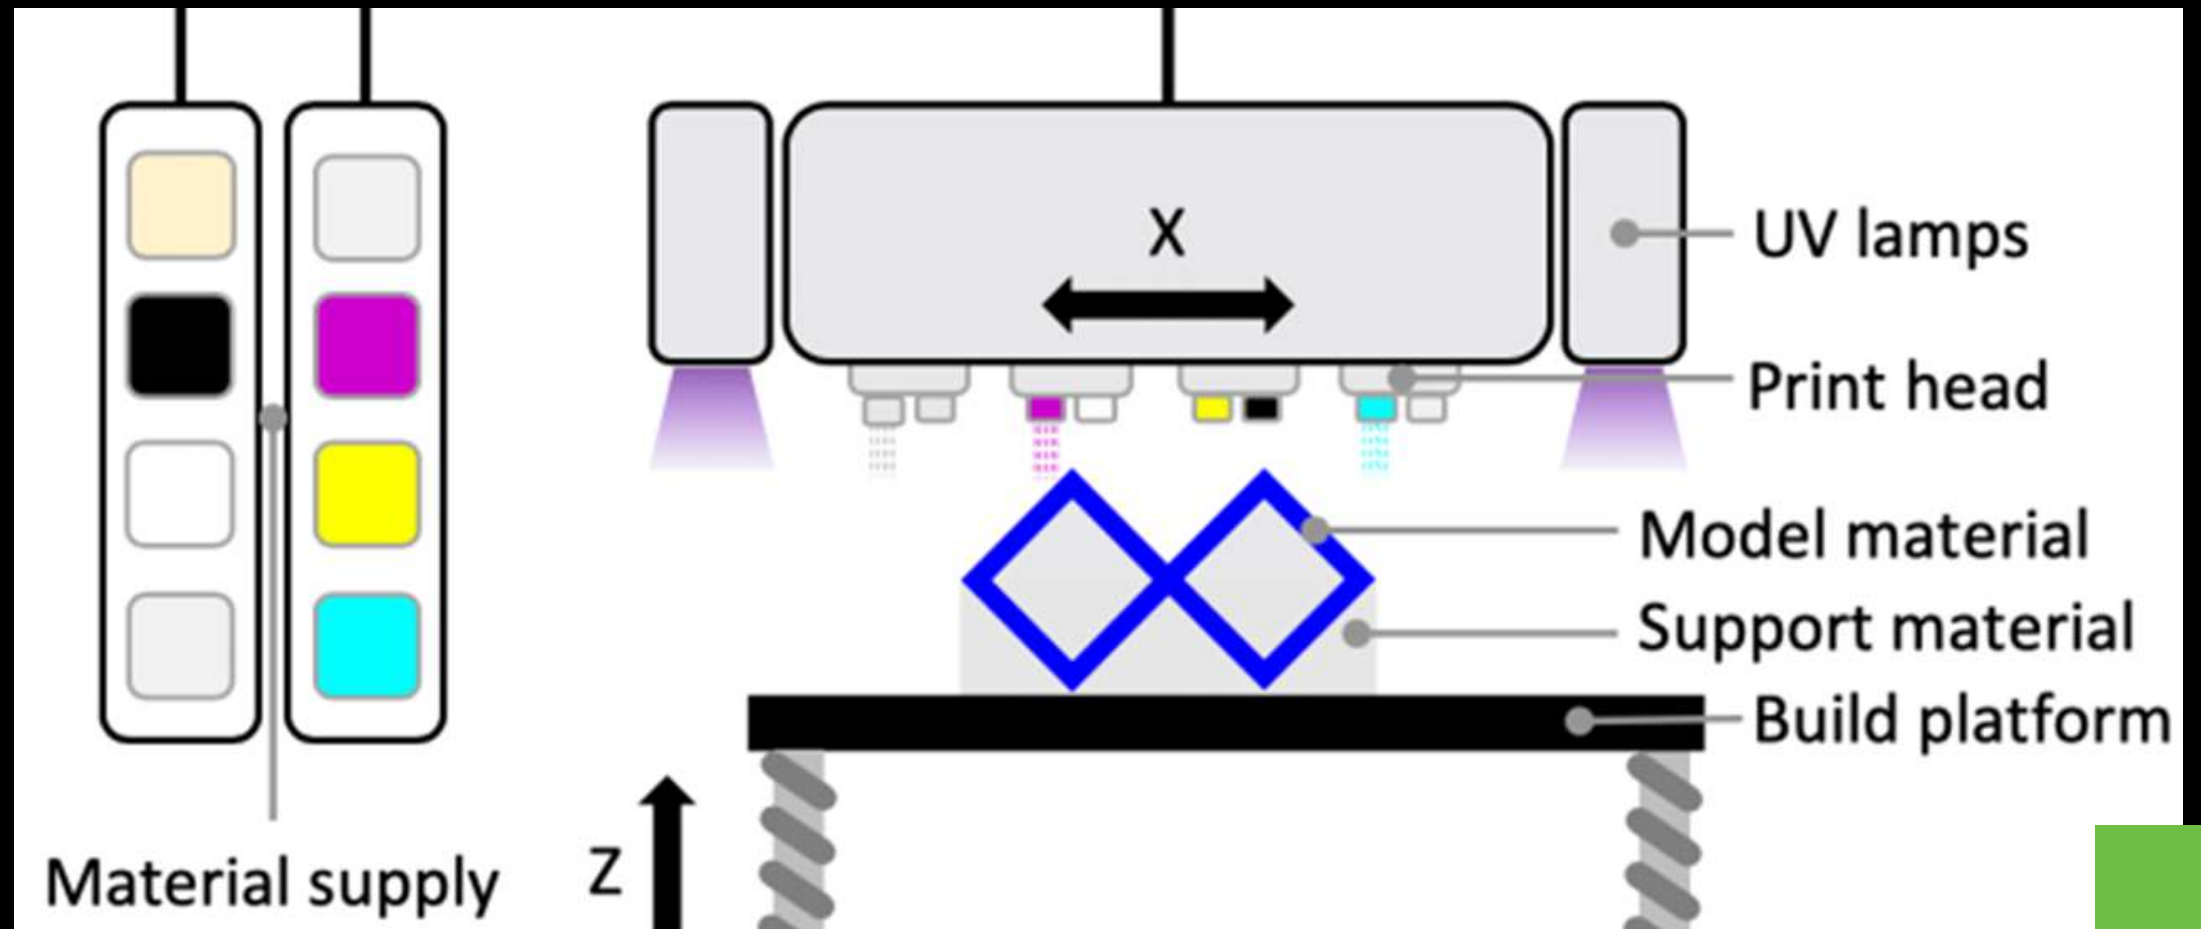



# Polyjet Material Groups

## GENERAL RIGID

- VERO FAMIL
- VIVID COLORS FAMILY
- RGD720
- RIGUR•DURUS

## ENGINEERING MATERIALS

- DIGITAL ABS PLUS FAMILY
- HIGH TEMPERATURE

## SPECIALTY/ DENTAL

- BIOCOMPATIBLE MED610
- DENTAL MATERIALS
- VEROGLAZEMED620
- VERODENTMED670
- VERODENTPLUSMED690
- VEROFLEXFAMILY
- HEARING AID MATERIALS

## GENERAL FLEXIBLE


- TANGO FAMILY
- AGILUS30 FAMILY



## Biocompatibility of MED610 as a Component in Gas Path Devices

Prepared For: **Stratasys**

30 March, 2020

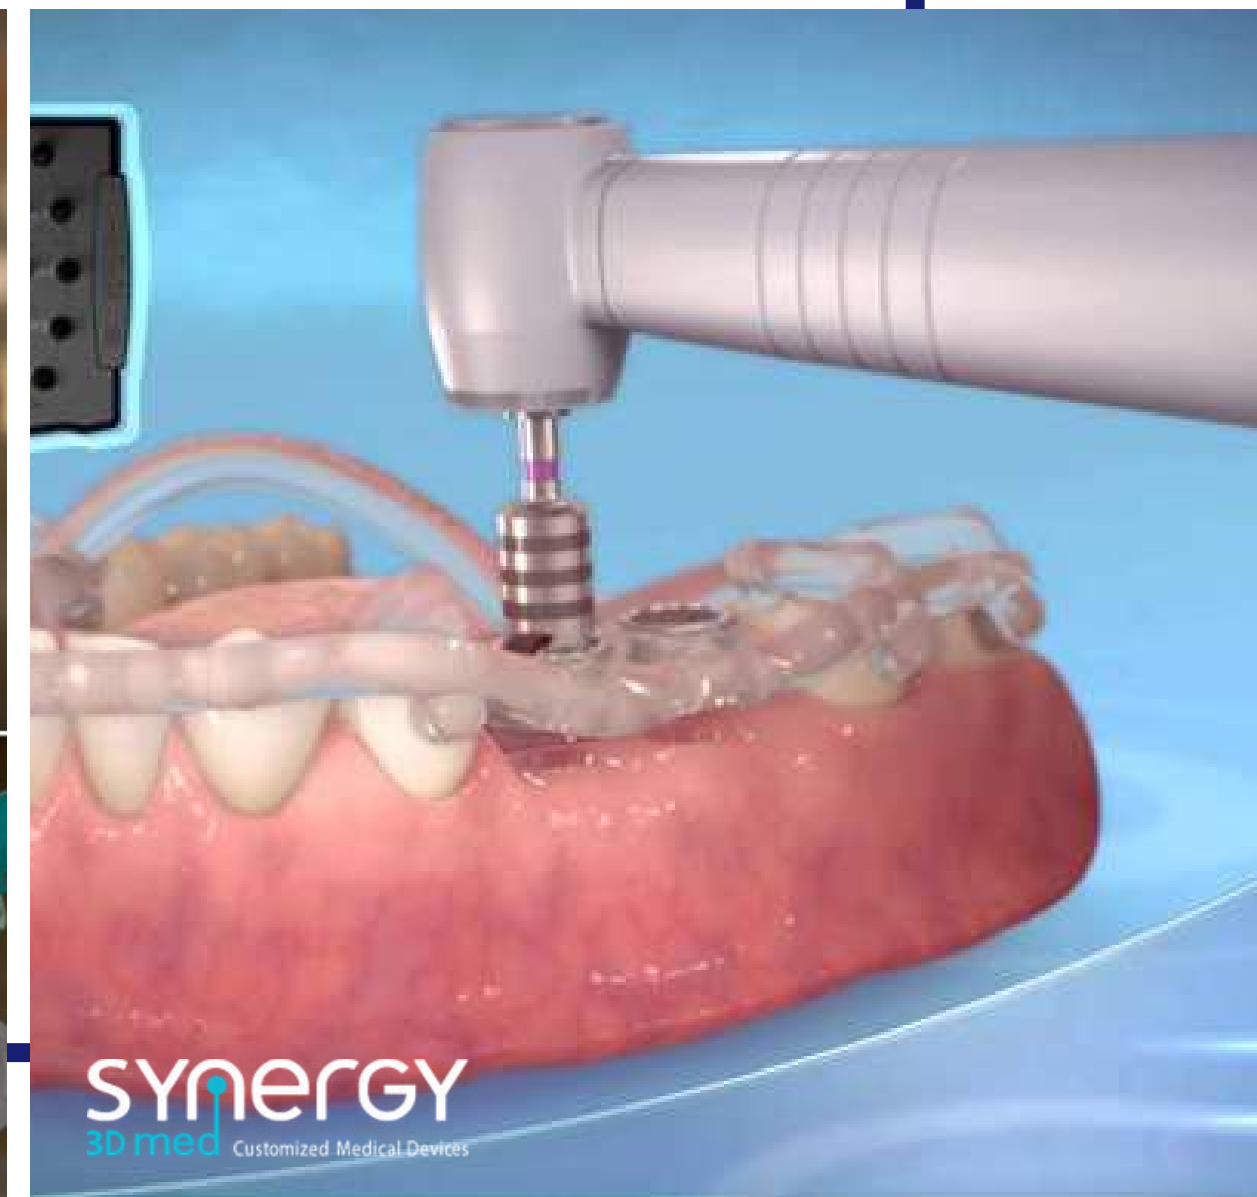



# MULTI MATERIALES





# REDUCING TIME TO MARKET

".50 % Reduction in Lead Time."







# PANTONE VALIDATION

**stratasys®**

Printed by J850



# WORKFLOW PROCESS

## 3D PRINT DESIGN ITERATIONS FROM CONCEPT TO FINAL DESIGN



**stratasys**® Printed by J850





This Was Entirely 3D Printed | Prototype and Packaging



Watch later



Share



לצפיה





STRATASYS המדפסת השולחנית-צבעונית ראשונה מסוגה מבית J55



Watch later



Share

**Designed  
for your  
classroom.**



לצפיה



# CMF Design Challenges







# The Mission of PolyJet





Stratasys J55



# DIGITAL ANATOMY PRINTING





## לראשונה בהדסה: טכנולוגיה של הדפסת תלת ממד הצילה את היד של בת 13

לראשונה ביחידה לכירורגיה של היד בהדסה נותחו בני נוער עם שברים מורכבים באמות היד בטכנולוגיה הכוללת הדפסת דגם תלת מימד של האזור הפגוע. ד"ר שי לוריא: "על הדגמים הללו יכולנו לתכנן את מהלך הניתוח עד לרמת מילימטרים"

פורסם בתאריך: 14.6.20 15:22

מאת: מערכת "כל העיר"

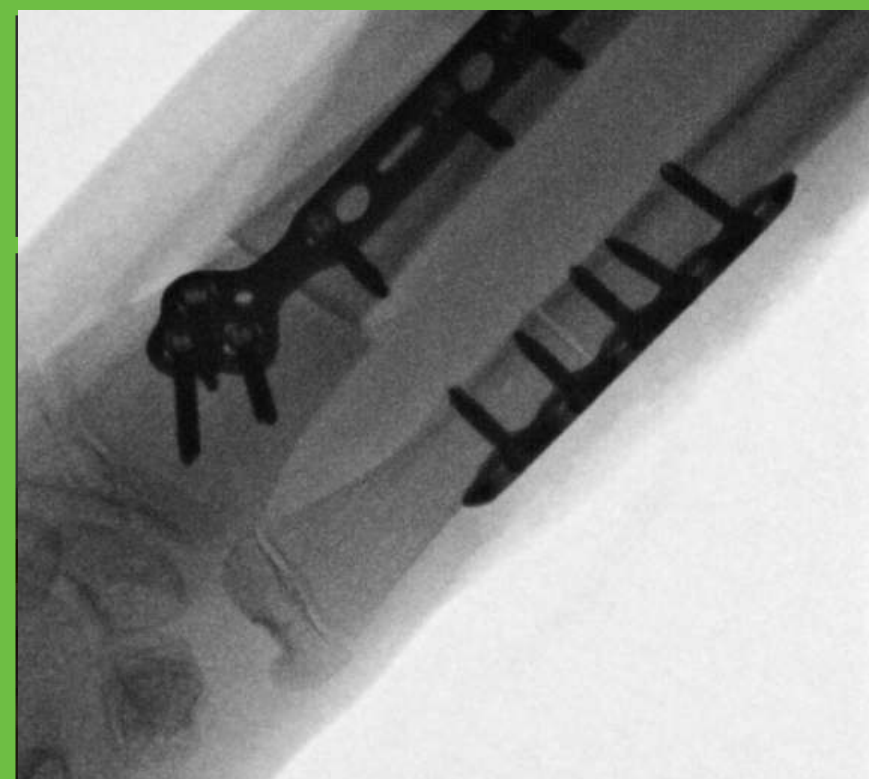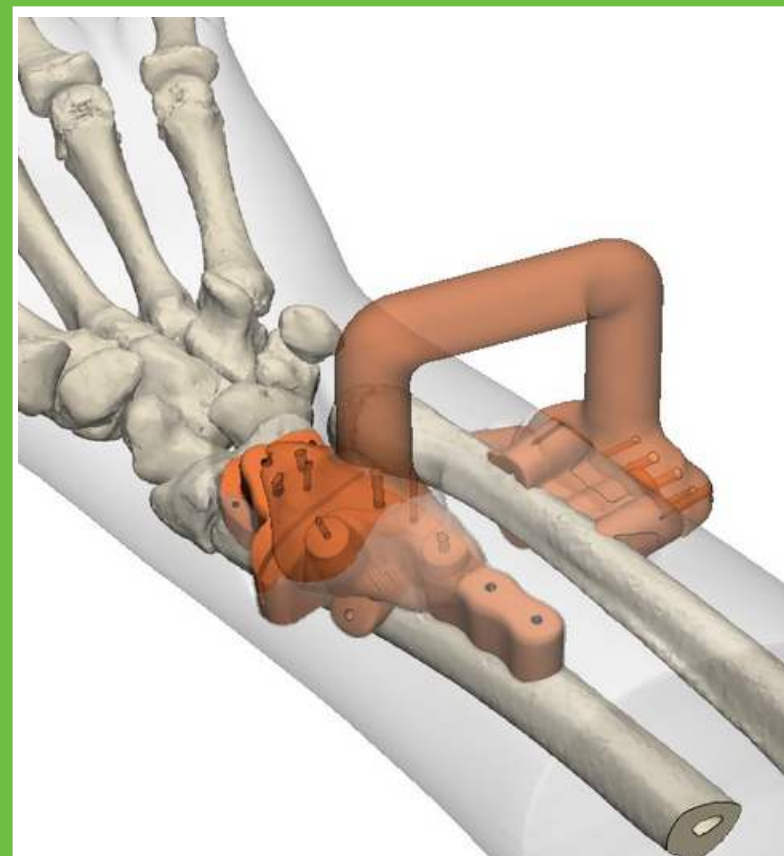





FDM




## Areas where 3D printing use cases are expanding rapidly:



**JABIL**



# Materials / World of Plastics

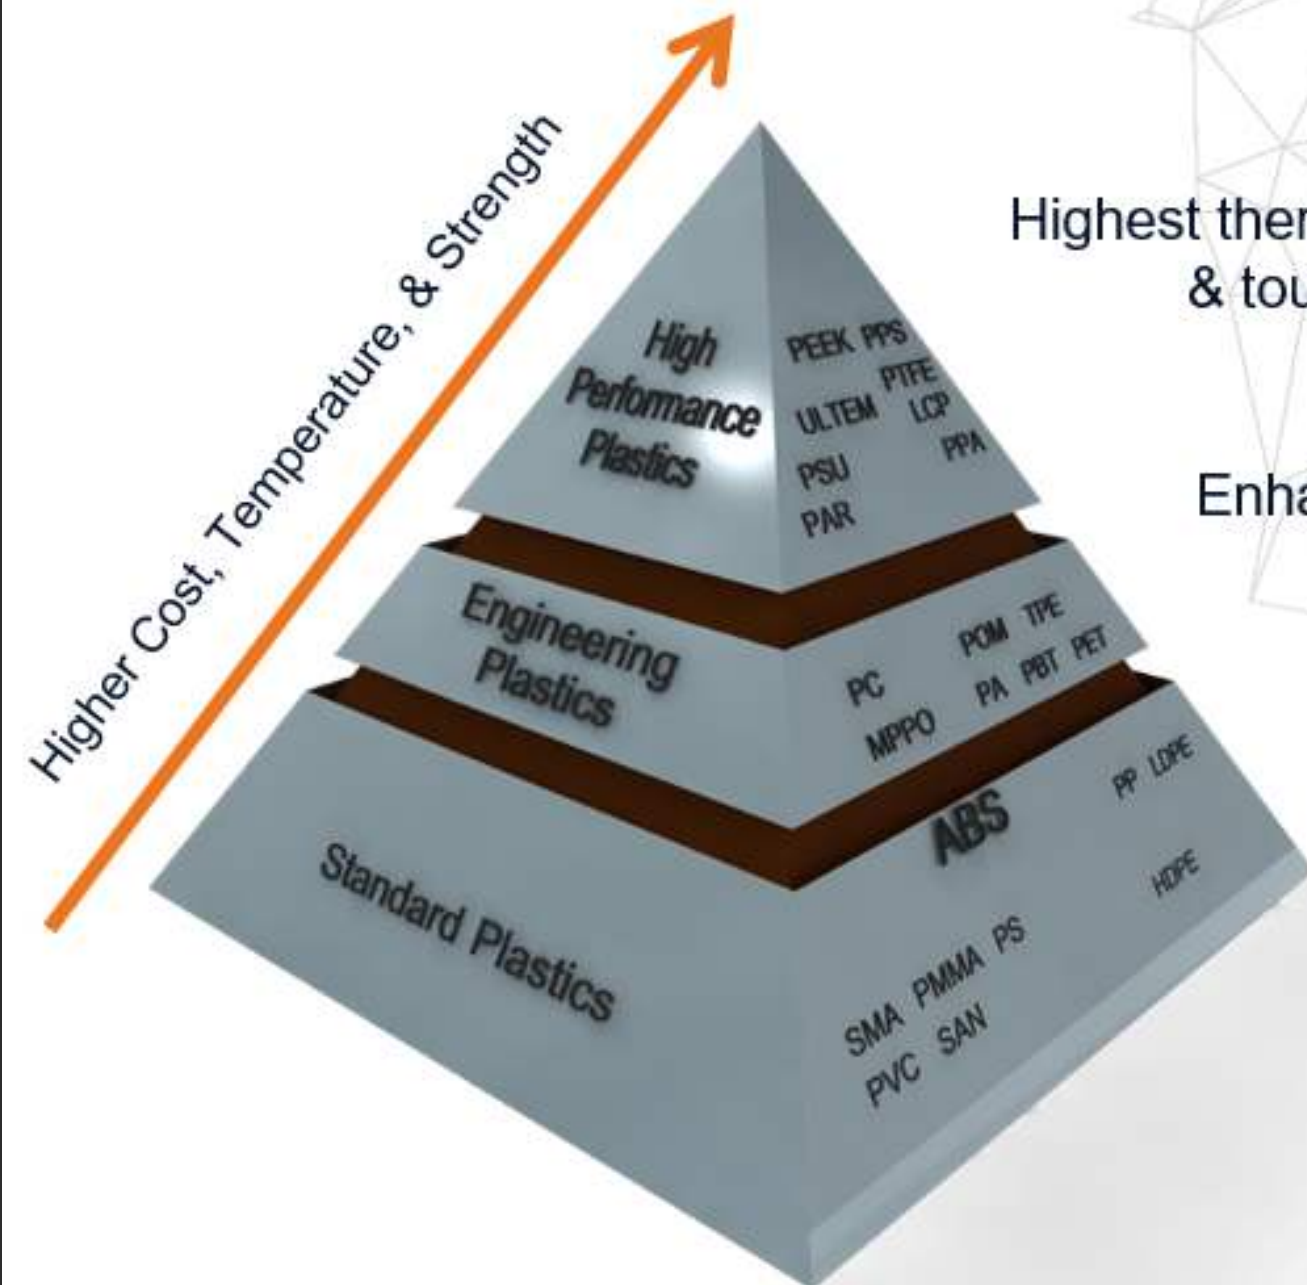


Highest thermal resistance  
& toughness

Enhanced thermal resistance  
& toughness

Average thermal resistance  
& toughness



According to a survey of STATISTA from 2018 the scope of use of the materials is:

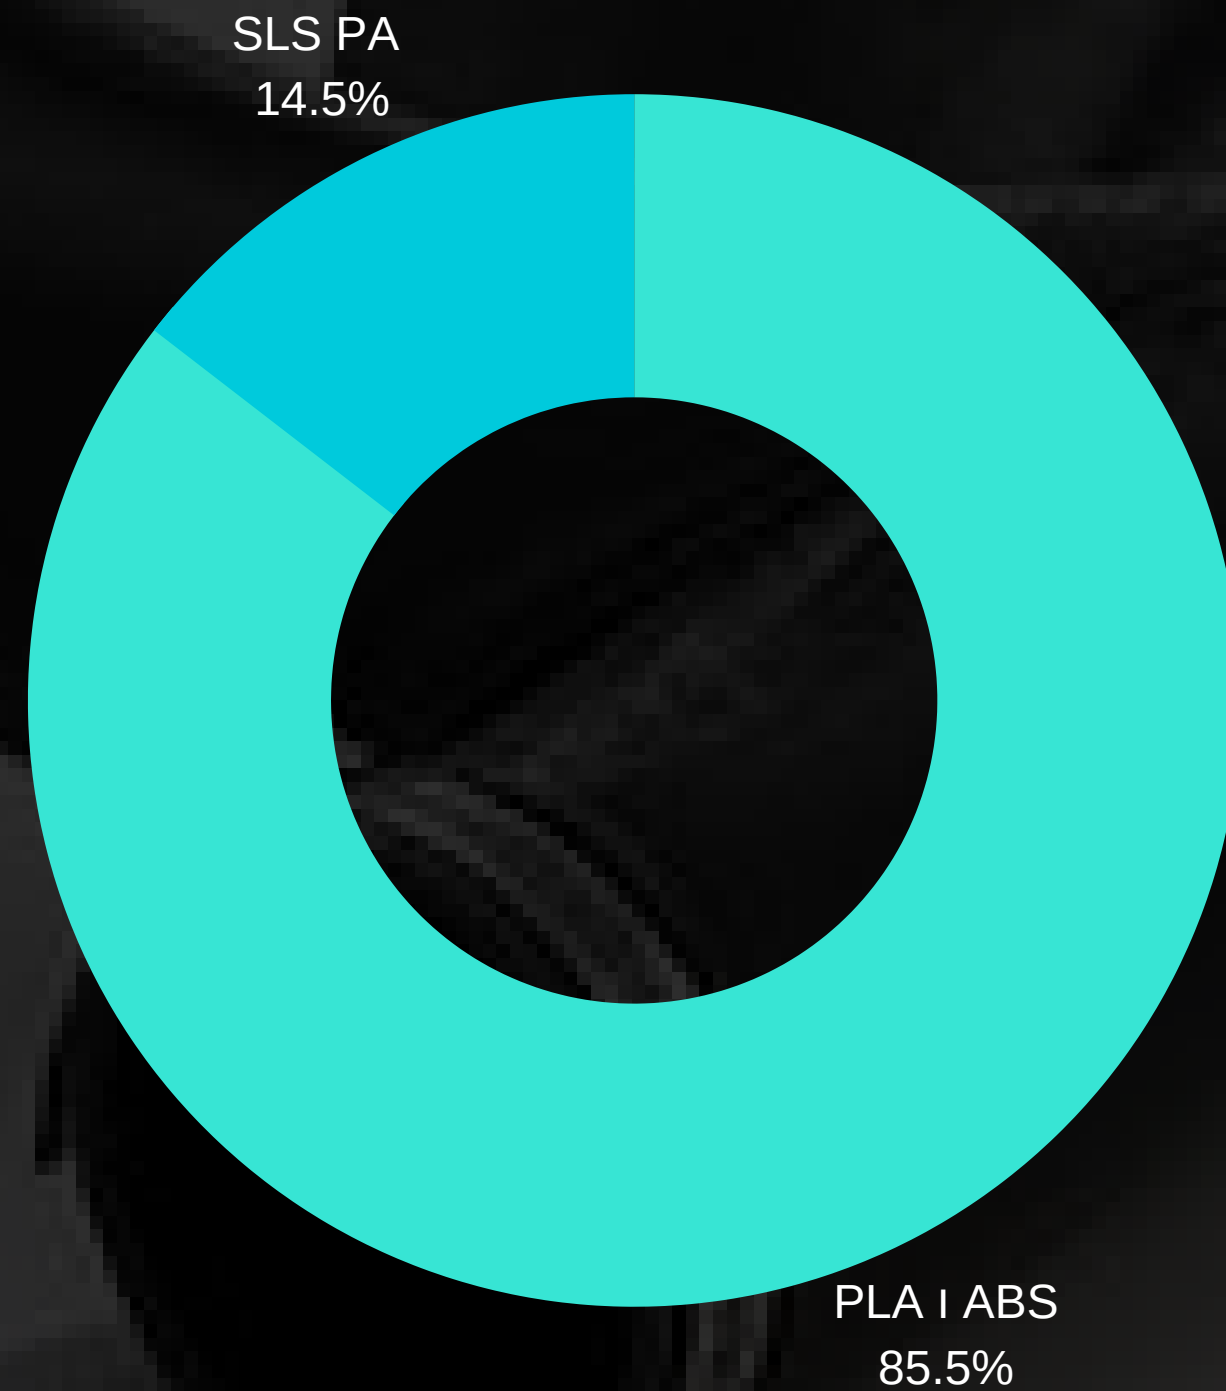

# FDM MATERIAL GROUPS

## GENERAL

- ABSPLUS
- ABS-M30
- ABS-M30I
- ABS-ESD7
- ABSI
- ASA
- PLA
- TPU

## ENGINEERING-GRADE

- PC
- PC-ABS
- PC-ISO
- FDM NYLON 12
- FDM NYLON 6

## HIGH PERFORMANC

- ULTEM™ 1010 RESIN – FOOD GRADE
- ULTEM™ 9085 RESIN
- PPSF / PPSU
- FDM NYLON 12CF
- ANTERO800NA (PEKK)

## SPECIALTY PRODUCTS

- ST-130

\*ULTEM™ IS A REGISTERED TRADEMARK OF SABIC OR AFFILIATES.



# Fire Protection of Railway Vehicles

## EN-45545-2

ULTEM™ 9085 resin was printed with a T16A tip on the Stratasys F900 and tested per EN-45545-2. The testing establishes that this material meets requirements for:

- R1 HL1/2/3 at 25 mm thick in XY and XZ orientations and 5 mm in XZ orientation
- R2 HL1/2/3 at 5 mm thick in XY orientation.

Table 9. ULTEM™ 9085 Resin Fire Protection of Railway Vehicles Test Results

Test	Results	5mm XY	5mm XZ	25mm XY	25mm XZ
ISO 5659-2	Ds(4)	-	-	38	57
	VOF4	-	-	62	94
	Dm	-	-	228	231
ISO 5659-2 + EN 45545-2 Appendix C	ITC 4 minutes	-	-	0.02	0.01
	ITC 8 minutes	-	-	0.08	0.06
ISO 5660-1	MAHRE (kW/m2)	-	-	24.1	19.9
ISO 5658-2	CFE (kW/m2)	16.5	12.5	29.9	28.6

## Outgassing

ULTEM™ 9085 resin, natural and black, was printed with a T20 and T16 tip on the Stratasys F900 and tested per ASTM E595. Full report available upon request.

Table 8. ULTEM™ 9085 Resin Outgassing Test Results

Sample	TML (%)	CVCM (%)	WVR (%)
ULTEM™ 9085 Resin, Natural, T20 Tip	0.34	0.02	0.35
ULTEM™ 9085 Resin, Natural, T16A Tip	0.37	<0.01	0.38
ULTEM™ 9085 Resin, Black, T16 Tip	0.33	< 0.01	0.22
Testing Observations <sup>(1)</sup>			
Visible Condensate	No	Opaque	N/A
Percent Covered	0%	Interference Fringes	N/A
Thin	N/A	Colored Fringes	N/A
Heavy	N/A	Sample appearance after test	No change
Transparent	N/A		

(1) Observations apply to all tested samples

- ST-130



# CERTIFIED AND VALIDATED MATERIAL

## Certified ULTEM 9085 Resin



ULTEM™ 9085 resin is a flame-retardant high-performance thermoplastic for digital manufacturing and rapid prototyping. It is ideal for the transportation industry due to its high strength-to-weight ratio and its PST (flame, smoke and toxicity) rating. This unique material's certifications make it an excellent choice for the commercial transportation industry—specifically aerospace, marine and ground vehicles. Combined with a Fortus® 3D Printer, ULTEM 9085 resin allows design and manufacturing engineers to produce fully functional parts that are ideal for advanced functional prototypes or end use without the cost or lead time of traditional tooling. Stratasys Certified ULTEM 9085 resin meets the extensive, more stringent test criteria and retains material traceability required by the aerospace industries and regulatory agencies.

- A Certificate of Analysis for both raw material and filament are supplied, documenting test results and identification to match filament manufacturing lot number to raw material batch number. This allows traceability from printed part back to raw material.
- A Certificate of Conformance confirms that the material is manufactured in compliance to approved standards and industry specifications.

Mechanical Properties	Test Method	XY Orientation	XZ Orientation	ZX Orientation	ZX-45 Orientation
Tensile Strength, Ultimate (Type 1, 0.130")	ASTM D638	67 MPa (9,700 psi)	77 MPa (11,200 psi)	50 MPa (8,500 psi)	55 MPa (8,000 psi)
Tensile Strength, 0.2% offset yield (Type 1, 0.130")	ASTM D638	38 MPa (5,500 psi)	45 MPa (6,500 psi)	38 MPa (5,500 psi)	37 MPa (5,400 psi)
Tensile Modulus (Type 1, 0.130")	ASTM D638	2.22 GPa (327 ksi)	2.6 GPa (377 ksi)	2.4 GPa (347 ksi)	2.35 GPa (341 ksi)
Tensile Elongation at Break (Type 1, 0.130")	ASTM D638	7.00%	6.21%	9.03%	9.10%
Flexural Strength	ASTM D790	116 MPa (16,700 psi)	130 MPa (18,900 psi)	83 MPa (12,100 psi)	84 MPa (12,200 psi)
Flexural Strength 0.2% Offset	ASTM D790	85 MPa (12,300 psi)	98 MPa (14,200 psi)	79 MPa (11,400 psi)	75 MPa (10,900 psi)
Flexural Modulus	ASTM D790	2.4 GPa (354 ksi)	2.6 GPa (380.5 ksi)	2.3 GPa (338.5 ksi)	2.2 GPa (314 ksi)
Compressive Strength Yield (modified type II, 2)	ASTM D695	54 MPa (7,800 psi)	75 MPa (10,800 psi)	57 MPa (8,300 psi)	56.5 MPa (8,100 psi)
Compressive Modulus (modified type II, 2)	ASTM D695	2.7 GPa (394 ksi)	3.1 GPa (448 ksi)	2.8 GPa (403 ksi)	2.85 GPa (414 ksi)
Shear Strength (V-notch In-Plane Shear)	ASTM D6370	80 MPa (11,600 psi)			
Shear Modulus	ASTM D6370	0.9 GPa (131 ksi)			
CHT Strength	ASTM D6756	45 MPa (6,500 psi)	61 MPa (8,900 psi)	29 MPa (4,200 psi)	34.5 MPa (5,000 psi)
CHT Modulus	ASTM D6756	1.95 GPa (285 ksi)	2.4 GPa (343 ksi)	2.1 GPa (310 ksi)	2.1 GPa (300 ksi)
FHT Strength	ASTM D6742	52 MPa (7,500 psi)	69 MPa (10,000 psi)	50 MPa (7,300 psi)	46 MPa (6,700 psi)
FHT Modulus	ASTM D6742	2.4 GPa (343 ksi)	2.83 GPa (411 ksi)	2.6 GPa (376 ksi)	2.4 GPa (343 ksi)
FHC Strength	ASTM D6742	45 MPa (6,500 psi)	72 MPa (10,400 psi)	63 MPa (9,100 psi)	48 MPa (7,000 psi)
FHC Modulus	ASTM D6742	2.4 GPa (346 ksi)	2.8 GPa (400 ksi)	2.65 GPa (379 ksi)	2.6 GPa (373 ksi)
Single Shear Bearing	ASTM D6951	204 MPa (29,600 psi)	196 MPa (28,450 psi)	188 MPa (27,350 psi)	159 MPa (22,950 psi)

## Plastics for Additive Manufacturing

### Guide Information

Process Category: Material Extrusion

[View Blue Card Format](#)

E345258

## STRATASYS INC

7665 Commerce Way, Eden Prairie MN 55344-2001

## ULTEM™ 9085 Resin, ULTEM™ 9085 Resin CG

Polyetherimide (PEI), furnished as filaments

Color	Min. Thk (mm)	Flame Class	HWI	HA1	GWIT	GWFI	RTI Elec	RTI Imp	RTI Str
NC	0.508 3.0	V-0 V-0	- -	- -	- -	- -	105 105	105 105	105 105

Comparative Tracking Index (CTI): -

Dielectric Strength (kV/mm): -

High-Voltage Arc Tracking Rate (HVTR): -

IEC Comparative Tracking Index (Volts Max): -

IEC Ball Pressure (°C): -

ISO Tensile Strength (MPa): -

ISO Tensile Impact (kJ/m<sup>2</sup>): -

Inclined Plane Tracking (IPT) kV: -

Volume Resistivity (10<sup>8</sup> ohm-cm): -

High Volt, Low Current Arc Resis (D495): -

ISO Charpy Impact (kJ/m<sup>2</sup>): -

ISO Heat Deflection @1.80 MPa (°C): -

ISO Flexural Strength (MPa): -

ISO Izod Impact (kJ/m<sup>2</sup>): -

Process Category: Material Extrusion

Build Plane: Horizontal

Layer Thickness (mm): 0.254(T16)

Infill (%): -

Post Processing Method: Mechanical Breakage of Support Material

For use with printer: FORTUS™ 400, FORTUS™ 380, FORTUS™ 450, FORTUS™ 900mc, Stratasys F900™

Limited properties and ratings assigned to samples produced by the Additive Manufacturing technique representing a specific set of printing parameters and build strategy. Other print parameters and build strategies may result in significantly different results.

IEC/ISO small-scale test data does not pertain to building materials, furnishings and related contents. IEC/ISO small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.


Report Date: 2019-07-11






## **STRATASYS STRATEGIC INITIATIVES FOR AEROSPACE**

- Simplify the path to part certification, a must for additively manufactured parts for certified aircraft
- Establish collaborative partnerships to develop materials, systems and processes for aerospace

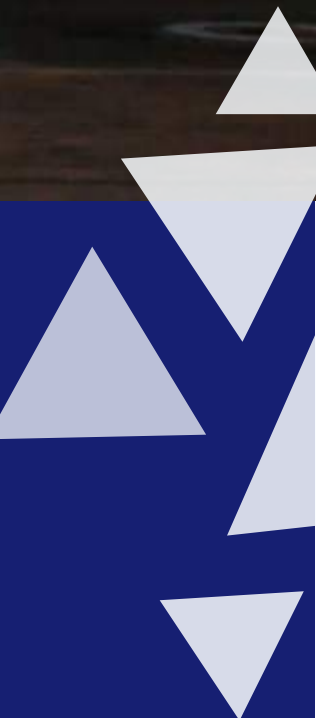



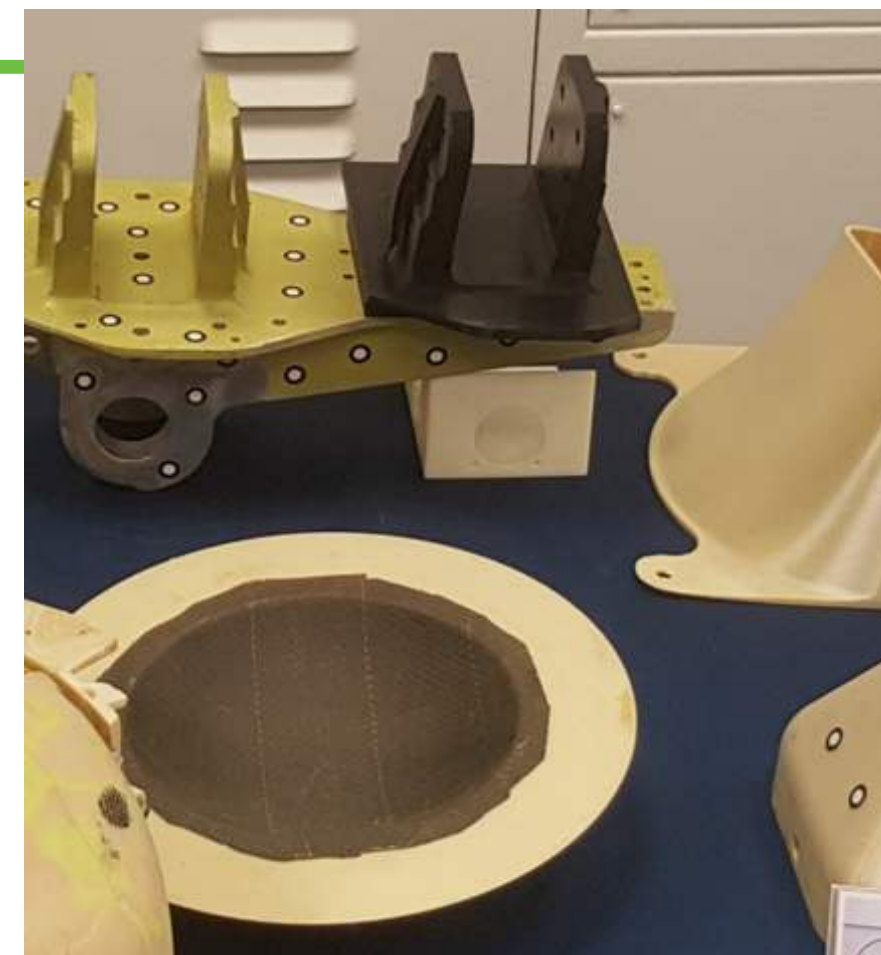





## First 3D printed parts on British passenger trains



↓94% lead time ↓50% cost



• LEUCHTENTRÄGER AUS ULTEM9085™ RESIN ANSTATT ALUDRUCK

# BOMBARDIER

External Duct in ULTEM 9085



# SHEET METAL FORMING

## CYCLE TEST

400 cycles with no signs of wear  
7075-O Aluminum  
0.090in (2.29mm)


## SHEET THICKNESSES

ü0.016in to 0.100in (0.41mm to 2.54mm)

## METALS FORMED

üAluminum alloys  
üSteels  
üStainless steels

üTitanium  
üInconel

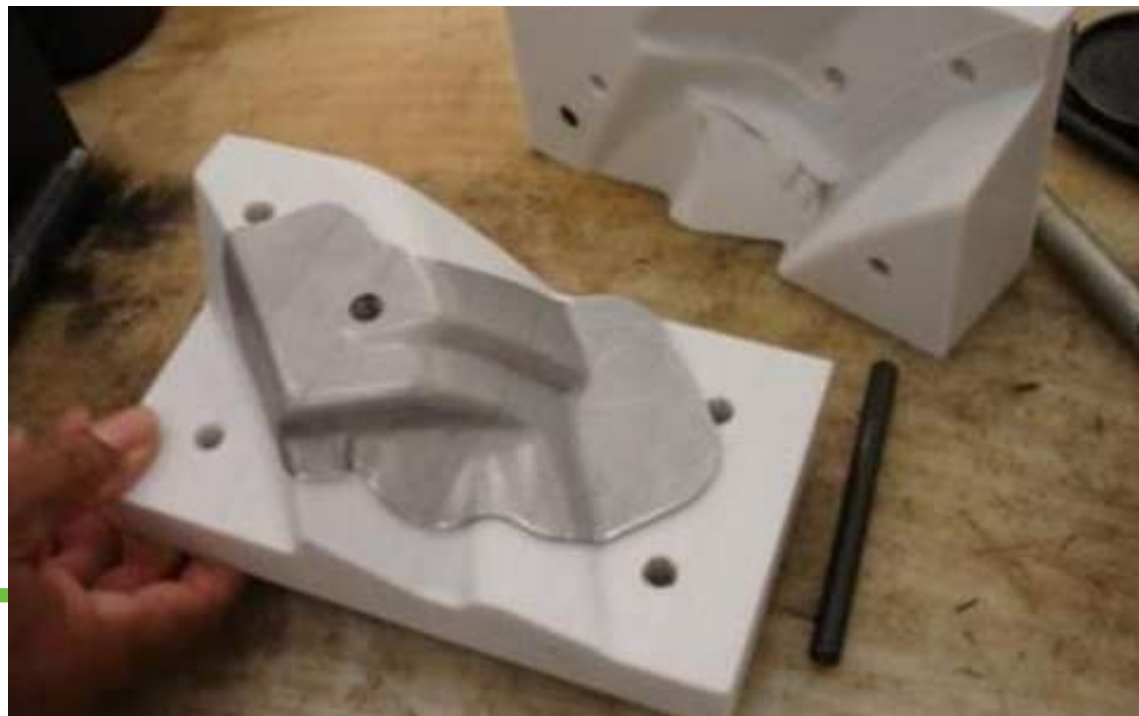

# PRINTING SPARE PART

## PRINTER:

Fortus900

## MATERIAL

ULTEM9085

**SIEMENS**





# ULTEM 1010

## 3D Print with the Strongest FDM Material.

ULTEM™ 1010 resin offers superior tensile strength and excellent chemical and thermal resistance for an FDM thermoplastic. Available in general-purpose and certified grades, ULTEM™ 1010 resin uses breakaway support. Certified grade is biocompatible and approved for food contact with NSF 51 and ISO 10993/USP Class VI certifications.

### BEHAVIOR AND USE



#### TENSILE STRENGTH, YIELD

64 MPa (XZ Axis)  
and 42 MPa (ZX  
Axis)



#### TENSILE MODULUS

2770 MPa (XZ Axis)  
and 2200 MPa (ZX  
Axis)



#### HDT

216 °C



#### IZOD IMPACT, NOTCHED

41 J/m (XZ Axis) and  
24 J/m (ZX Axis)



“

Not only do we enjoy a cost saving, but thanks to the ability to 3D print a customized part on-demand, there is no minimum order requirement. On certain orders we are witnessing cost savings of up to 55%.”


Alex Karetny

**Pack Line Ltd.**





2 Wissenschaftsstadt

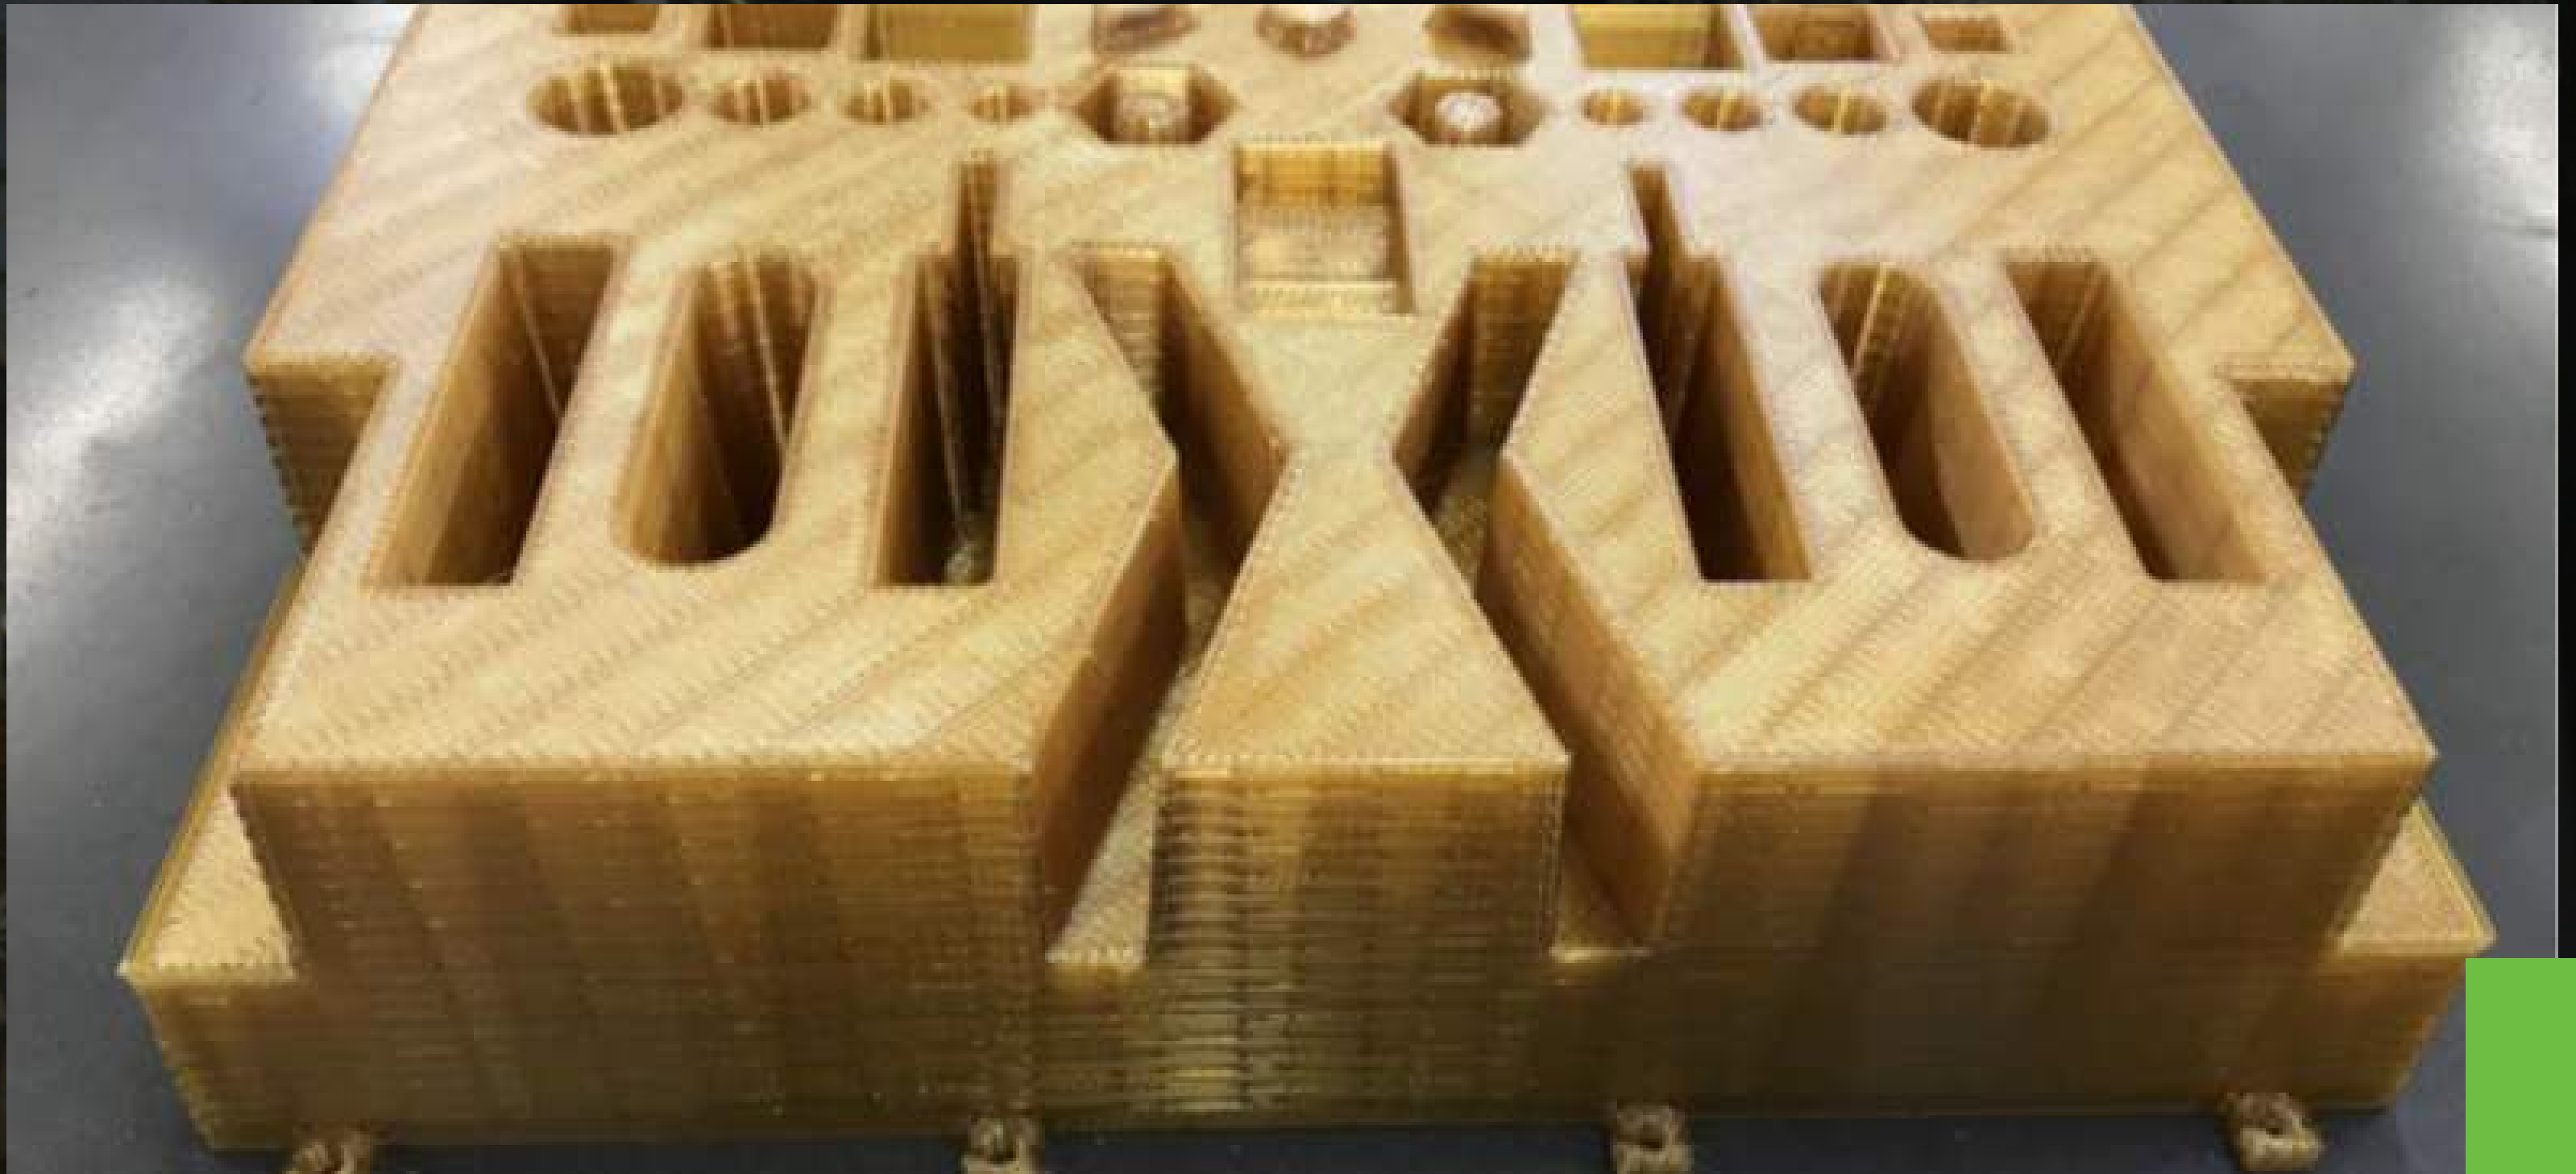




Periprosthetic infection is a common problem that many surgeons are facing but lacking standard solutions for reconstructing the bone defect created after removal of the infected implant.

Last week, a 52 Y male with a periprosthetic deep infection of a humeral implant following osteosarcoma resection of the distal humerus and elbow.

This 3D printed mold helps to achieve the accurate design and volume of an existing implant and replace it with a spacer. Otherwise, it would be done freehand. The challenge here was to produce a hinged spacer to preserve elbow movement during the antibiotic treatment period. The mold design enabled the surgeons to execute some innovative articulating solutions that cannot be done otherwise.

This case operated by Dr. [Solomon Dadia](#) and Dr. Omri Meroze, after planning and design sessions with the designer [Tal Wainer Katsir](#) from [Synergy3DMed](#).

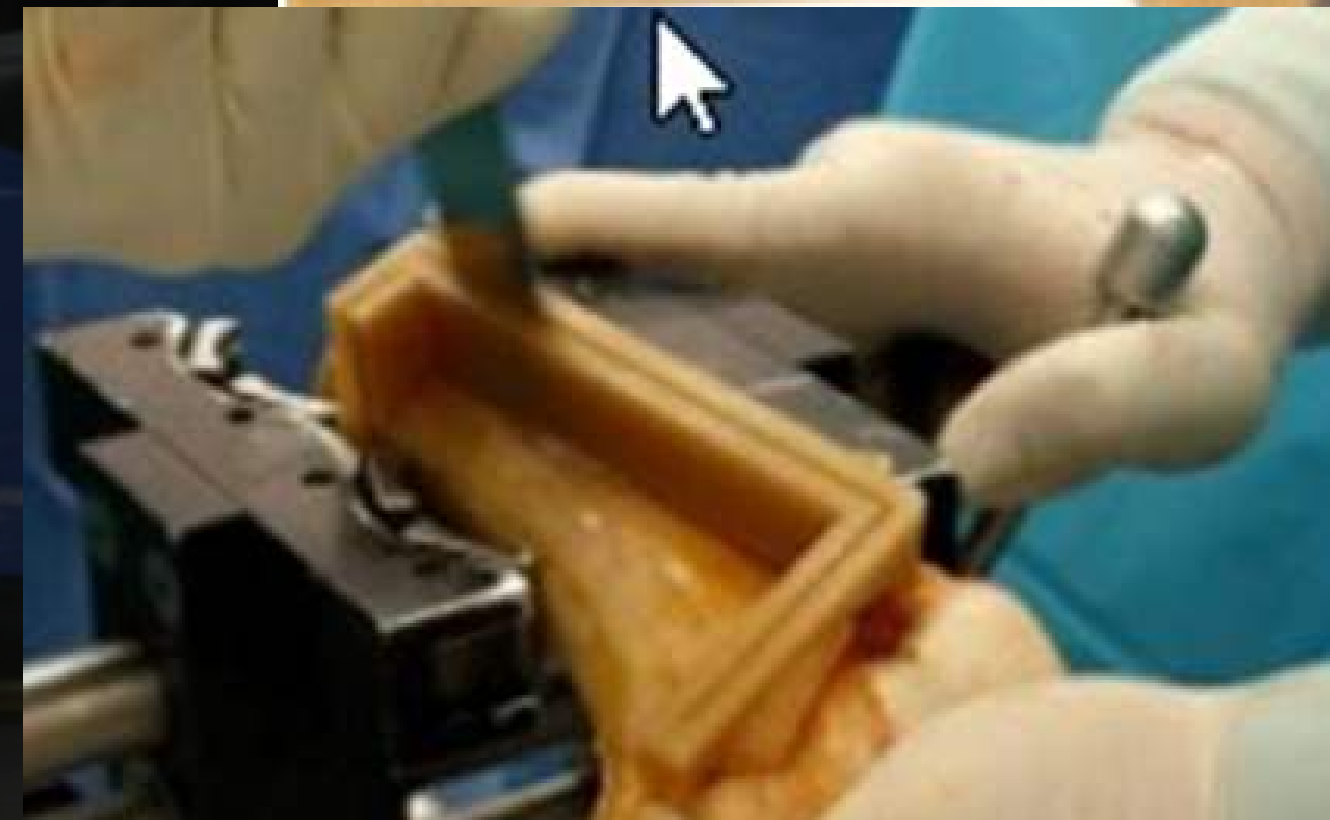



# ANTERO PEKK



## High-performance PEKK-based material

Antero 800NA PEKK-based thermoplastic possesses excellent mechanical properties that include high strength, high heat resistance, toughness and wear-resistance. These superior qualities make it a lighter alternative to aluminum and steel. Chemical resistance and minimal outgassing provide suitability for aerospace applications.

### BEHAVIOR AND USE



#### TENSILE STRENGTH, YIELD

93 MPa (XZ Axis) 46  
MPa (ZX Axis)



#### TENSILE MODULUS

3095 MPa (XZ Axis)  
34,834 MPa (ZX  
Axis)



#### HDT @66 PSI

150 °C



#### NOTCHED IMPACT

37 J/m (XZ Axis) 27  
J/m (ZX Axis)


Table 8. Antero 800NA Chemical Resistance Results

Change in Tensile Properties - 168 hour Chemical Exposure (ASTM D543)					
	Reagent	Non-Annealed XZ	Non-Annealed ZX	Annealed XZ	Annealed ZX
Tensile Strength	Dichloromethane	-88%	-81%	-15%	-1%
	Ethyl Acetate	-20%	-4%	-10%	-7%
	Jet A	-14%	-3%	-11%	-1%
	Methyl Ethyl Ketone	-17%	-7%	-16%	-7%
	Skydrol	-5%	16%	10%	-9%
	Toluene	-17%	-11%	-14%	-8%
	30% Nitric Acid	-8%	6%	-7%	7%
	30% Sulfuric Acid	2%	0%	-4%	1%
	60% NaOH	200%	-5%	7%	1%
	Concentrated Ammonia	2%	-4%	2%	4%
% Elongation @ Break	Dichloromethane	1135%	2264%	-11%	0%
	Ethyl Acetate	9%	-1%	0%	-5%
	Jet A	25%	-1%	45%	2%
	Methyl Ethyl Ketone	21%	-2%	16%	-2%
	Skydrol	24%	26%	48%	-7%
	Toluene	8%	-7%	12%	-7%
	30% Nitric Acid	-10%	8%	-12%	7%
	30% Sulfuric Acid	4%	-3%	-4%	4%
	60% NaOH	9%	-10%	8%	3%
	Concentrated Ammonia	10%	-9%	12%	11%
Tensile Modulus	Dichloromethane	-92%	-93%	-1%	-1%
	Ethyl Acetate	-3%	-4%	-3%	-1%
	Jet A	-3%	-3%	-4%	-3%
	Methyl Ethyl Ketone	-2%	-6%	-4%	-4%
	Skydrol	-3%	-4%	-1%	-4%
	Toluene	-1%	-4%	-3%	-3%
	30% Nitric Acid	0%	-6%	-2%	2%
	30% Sulfuric Acid	2%	0%	2%	-2%
	60% NaOH	-1%	7%	3%	0%
	Concentrated Ammonia	-1%	10%	0%	-8%




## Electrically Static Dissipative (ESD) PEKK

- Sensitive electronics applications requiring ESD properties
  - Electrical resistivity  $<10^9$  ohm
- Inherent flame resistance and high temperature capabilities

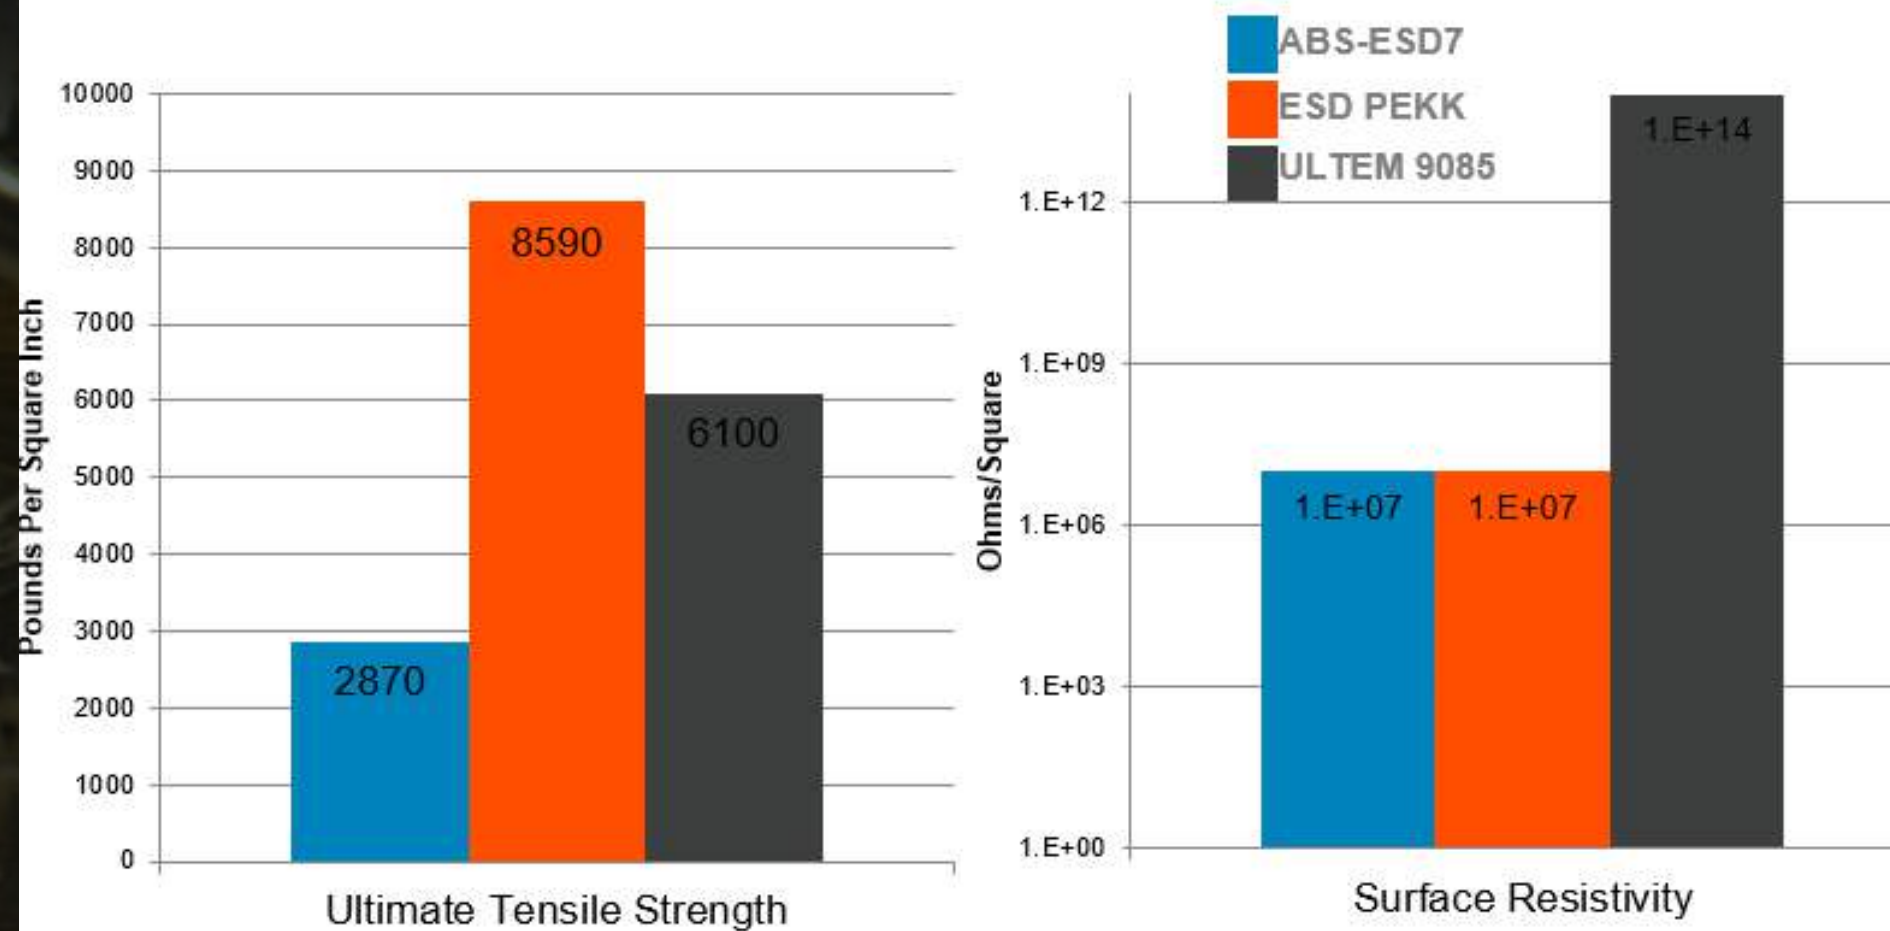

*Three piece electronics enclosure printed in ESD PEKK*



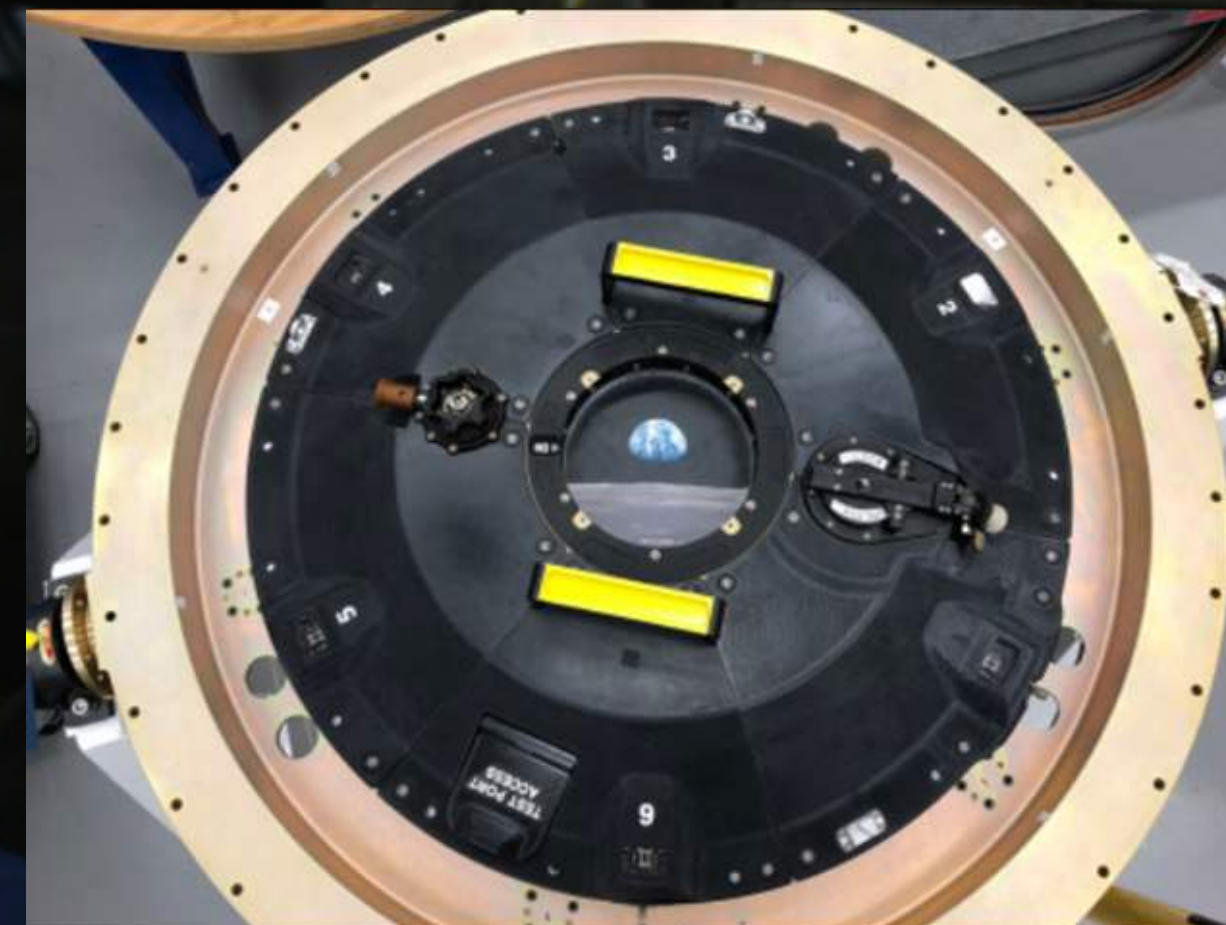

### Ultimate Tensile Strength

Antero 840CN03: 95 (13610)

ULTEM™ 9085 resin: 69 (9950)

Nylon 6: 68 (9800)





PC: 57 (8300)

MPa (PSI)

### ESD Safe





DOCUMENT NAME	FILE TYPE	
Antero 840CN03 data sheet	PDF	
Antero 840CN03 safety sheet	PDF	
Antero 840CN03 material guide	PDF	
Chemical Resistance of Antero 840CN03	PDF	
Electrical Properties of Antero 840CN03	PDF	
Materials Testing Procedure	PDF	



# Nylon12 CF

## Lightweight Strength, Carbon Fiber Reinforced

The combination of high strength, stiffness and light weight lets you use FDM Nylon 12CF to replace metal components, for lighter tools, functional prototyping and select end-use parts.

### BEHAVIOR AND USE



#### TENSILE STRENGTH

63.4 MPa (XZ Axis)  
28.9 MPa (ZX Axis)



#### TENSILE MODULUS

7515 MPa (XZ Axis)  
2300 MPa (ZX Axis)



#### HDT @ 264 PSI

143 °C




#### IZOD IMPACT, NOTCHED

85 J/m (XZ Axis)  
21.4 J/m (ZX Axis)



## End of Arm

- Weight savings:  
45 kg (61.25%)
- Cycle time savings:  
19.3%
- Cost savings:  
\$1,642 (29.8%)

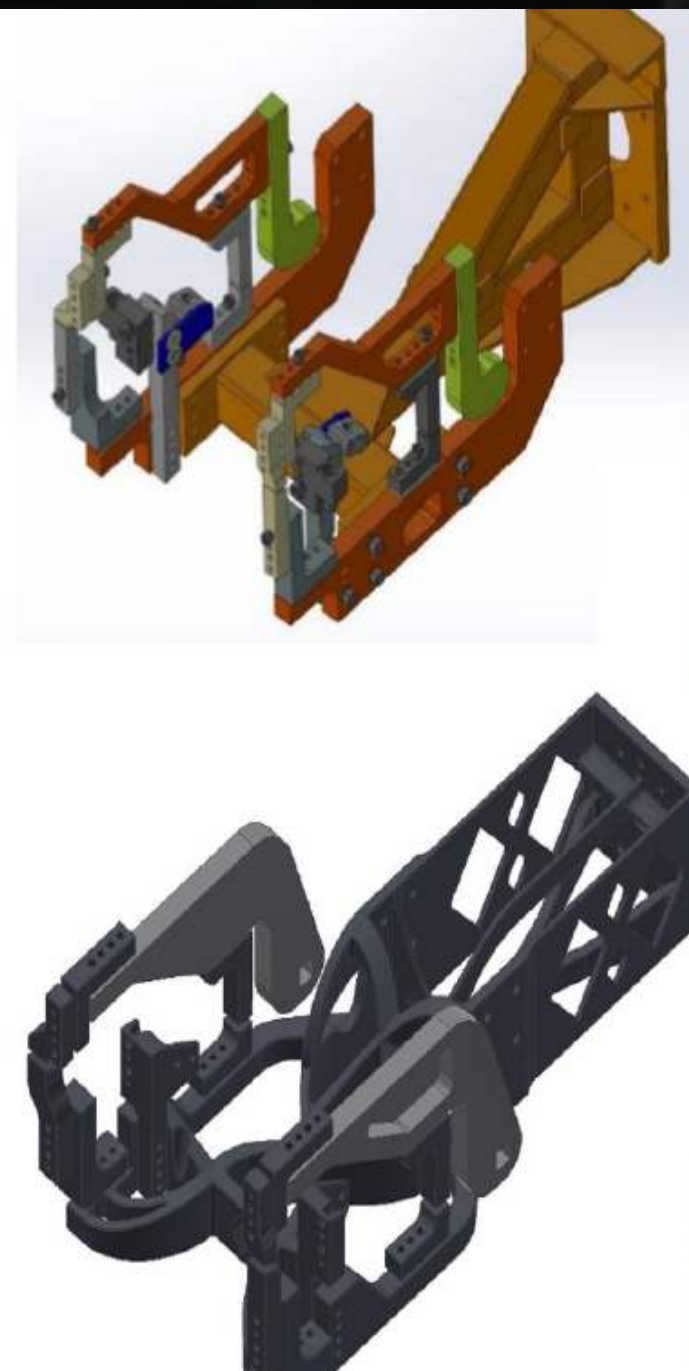




# CNC Tooling & Fixtures

- 3 to 7 times lighter with Nylon12CF than aluminum or steel
- Over 900 bars compressive strength
- Cost saving 50 to 60%
- Fixtures printed in hours not days





## GKN Driveline – Greasing Tool

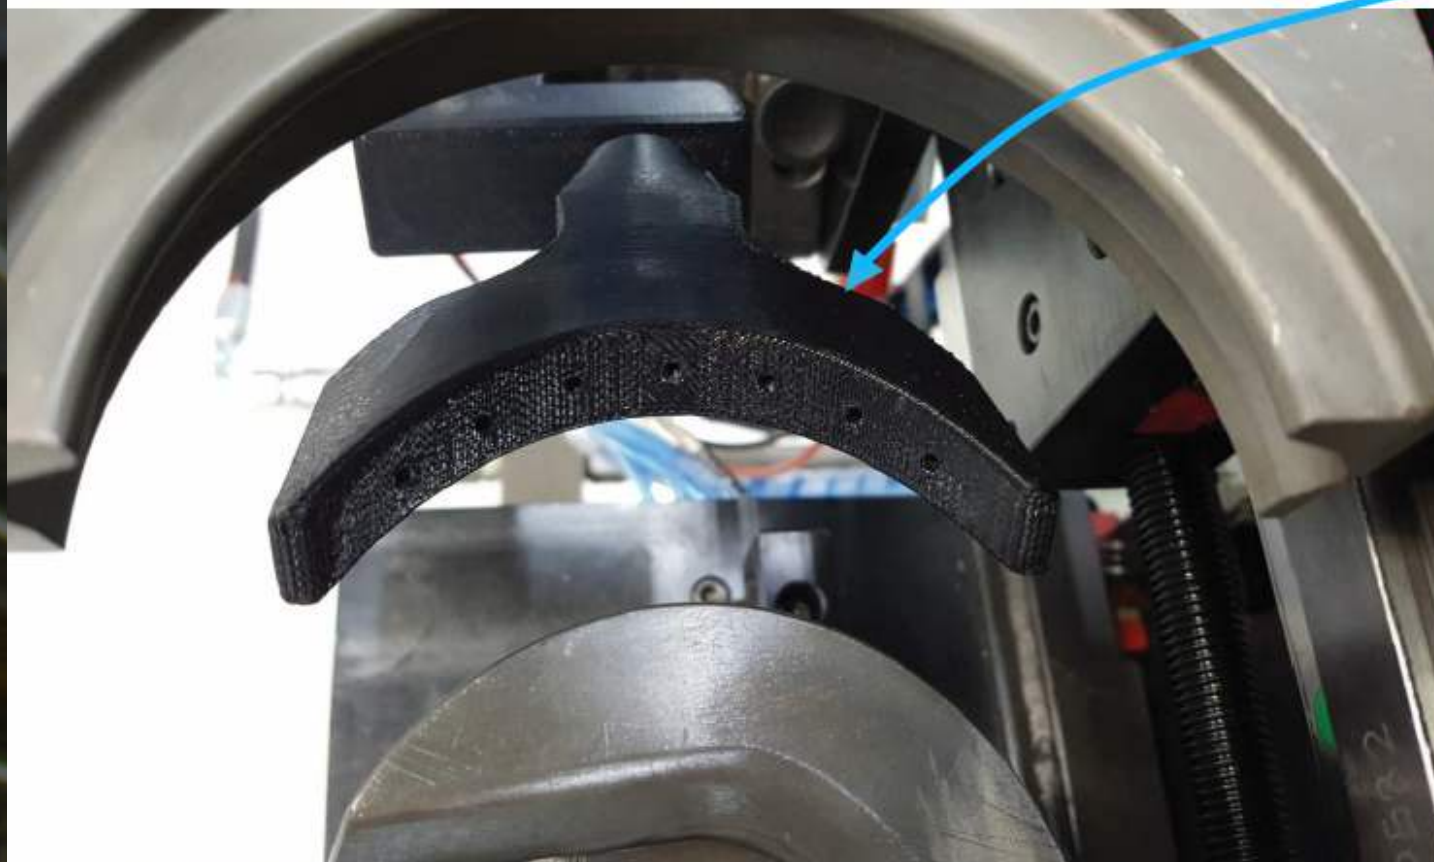

### Application

Greasing of a half shaft during production

### Challenge



Previously implemented as a bendable tube, where a high volume of oil was forced out a singular point of exit

This often lead to spills, requiring time to clean up





## AM optimized redesign

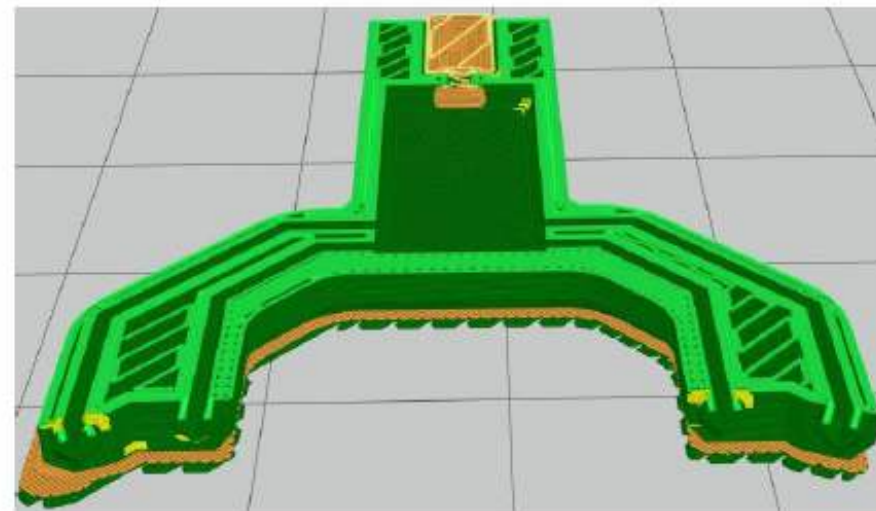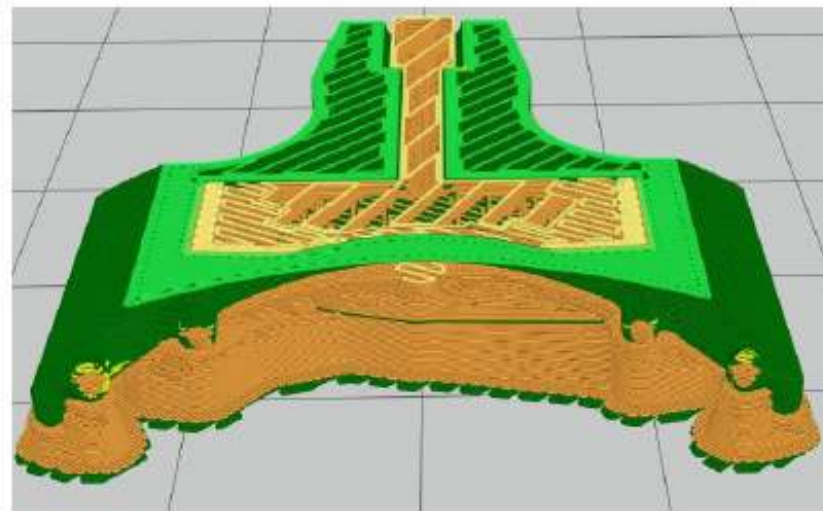

Estimated build time	2 hr 4 min	Estimated build time	1 hr 23 min
Model volume	2.215 in <sup>3</sup>	Model volume	1.728 in <sup>3</sup>
Support volume	0.921 in <sup>3</sup>	Support volume	0.216 in <sup>3</sup>
Fortus 450mc Model T16 tip Support T16 tip	0.0100 slice height ULTEM 9085 ULTEM support	Fortus 450mc Model T16 tip Support T16 tip	0.0100 slice height ULTEM 9085 ULTEM support
Part interior style	Solid	Part interior style	Solid
System mode	Normal	System mode	Normal



**Savings: 33% Build Time, 22% Model Material and 77% Support Material!**

### Result

- No support material generated for internal structures in optimized segments (even if green flagged)
- Tube connector utilizes traditional design for demonstrative purposes, could also be redesigned
- Lean tool that requires less material and time to be produced (in any case)



## What about mechanical properties?

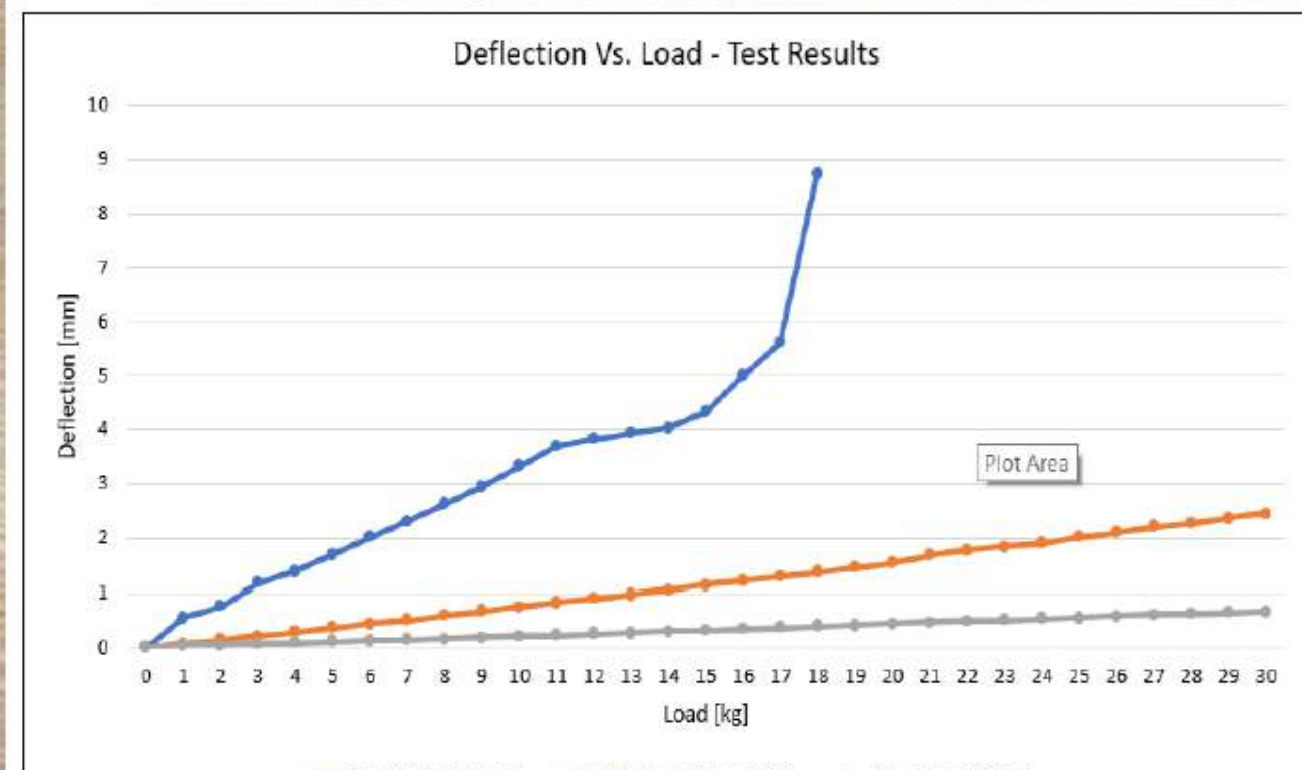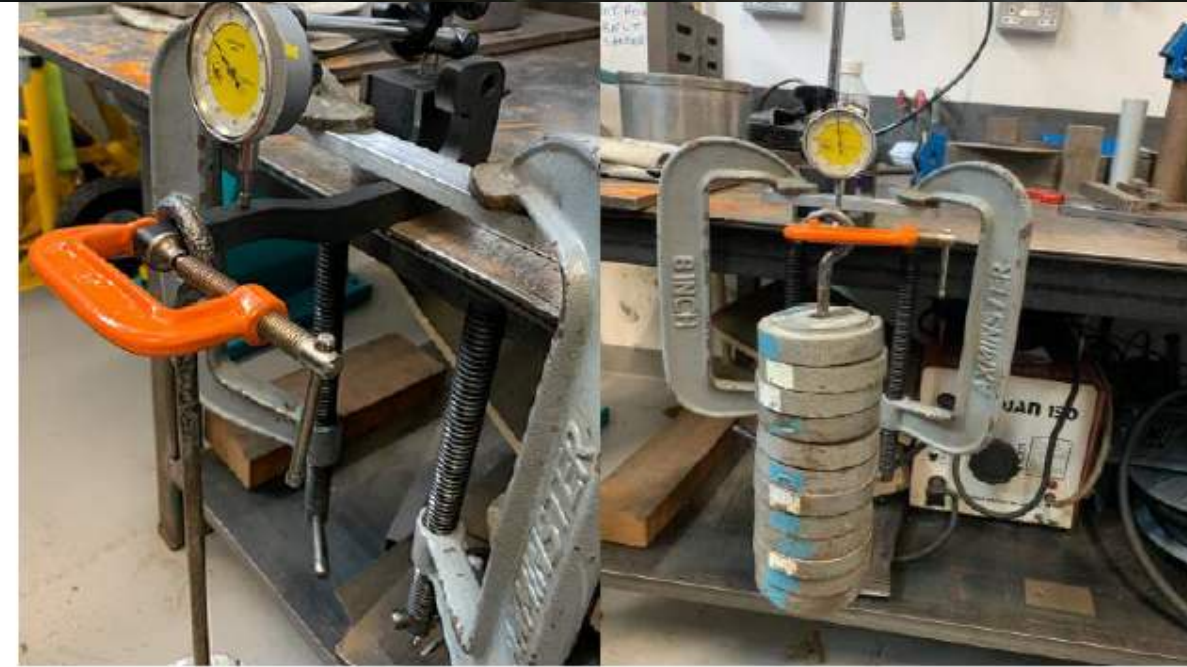



# TPU

## LEADING USE CASES



Tubes & Ducts



Hoses



Seals & Gaskets



Protective Covers



# F123 TPU 92A

Making the complex easy...with Stratasys soluble support

Competitors' subpar support makes their part production cost **1.8X MORE**

Stratasys' hands-free soluble support **decreases labor time by 76%**

Build large elastomer parts

Build the parts you need, and not just the parts your prototyping system makes









# standard engineering portfolio







# USAGE DYNAMICS




# REDUCTION OF LEAD TIME AND COST

---



**Printer:** Fortus 450MC – STRATASYS  
**Material:** ASA

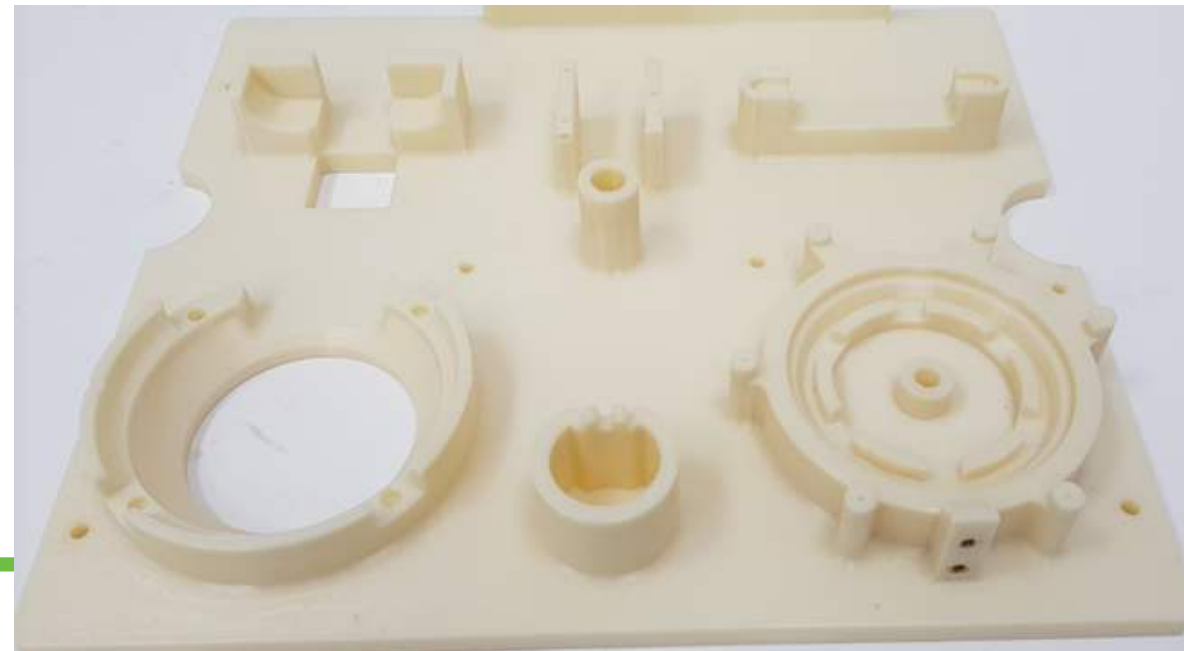


**Printer:** Fortus 450MC STRATASYS  
**Material:** ABS M30i



**Printer:** Fortus 450MC STRATASYS  
**Material:** Nylon12 CF




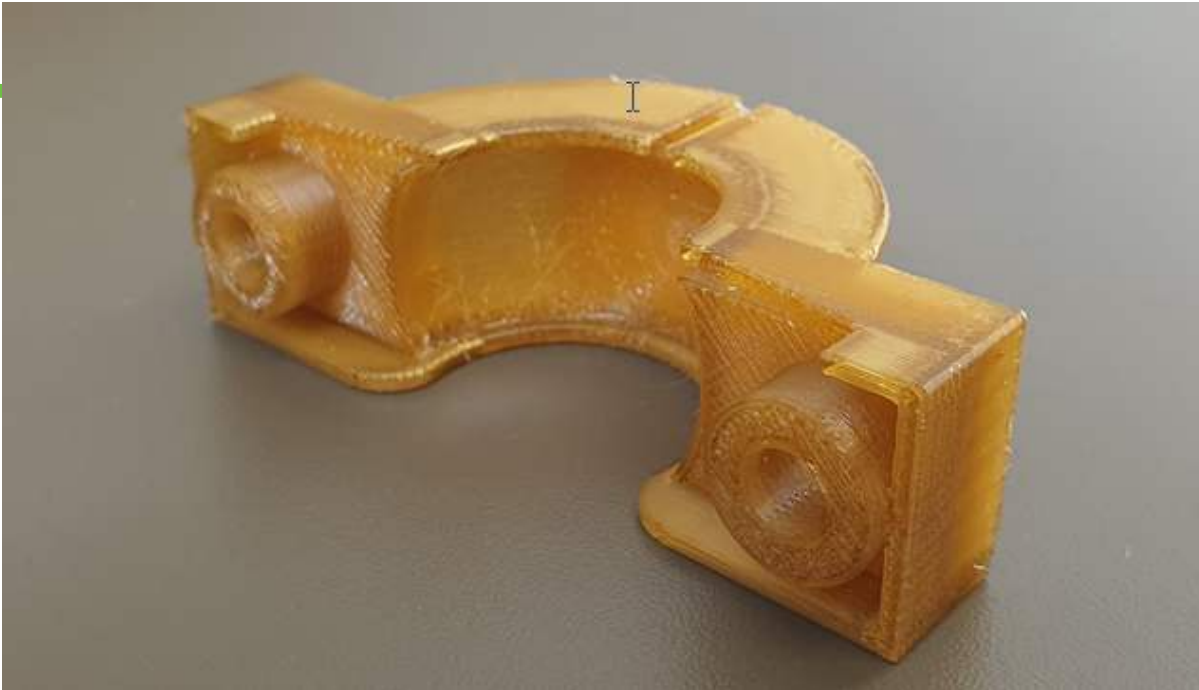

**Printer:** Fortus 450MC – STRATASYS  
**Material:** Antero800NA



**Printer:** Fortus 450MC – STRATASYS  
**Material:** ASA

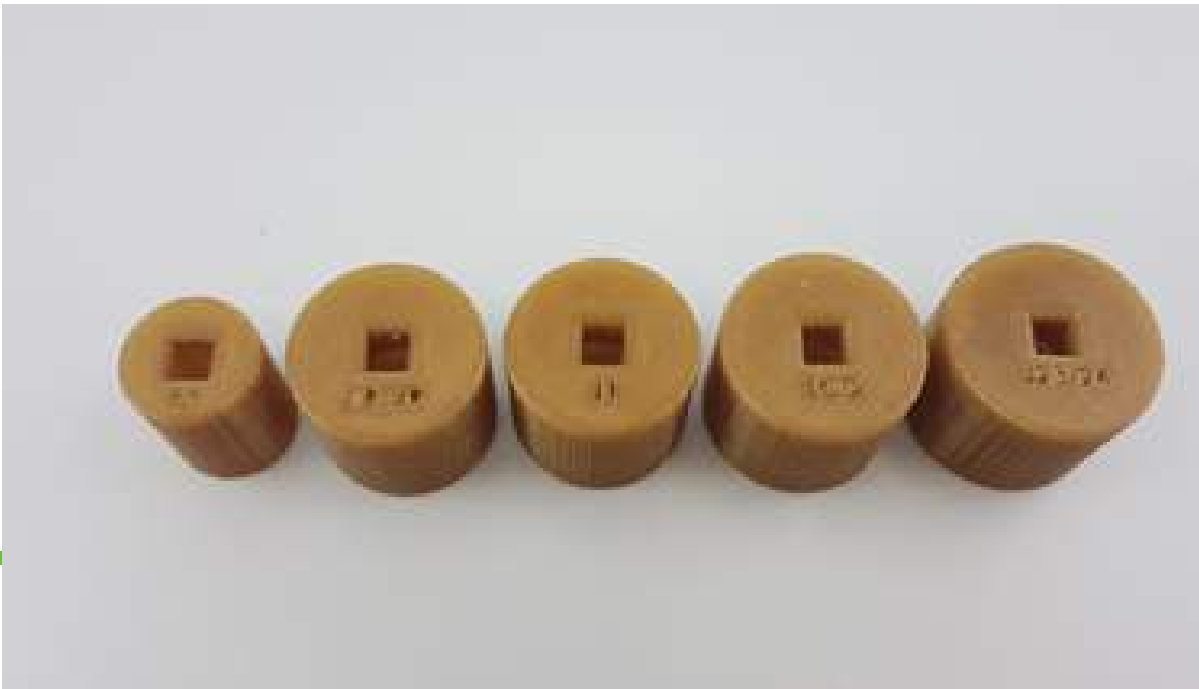


**Printer:** Fortus 450MC – STRATASYS  
**Material:** ULTEM9085



**Printer:** Fortus 450MC – STRATASYS  
**Material:** 1.ULTEM 9085 .2 ABS 3.Nylo




stratasys | F120

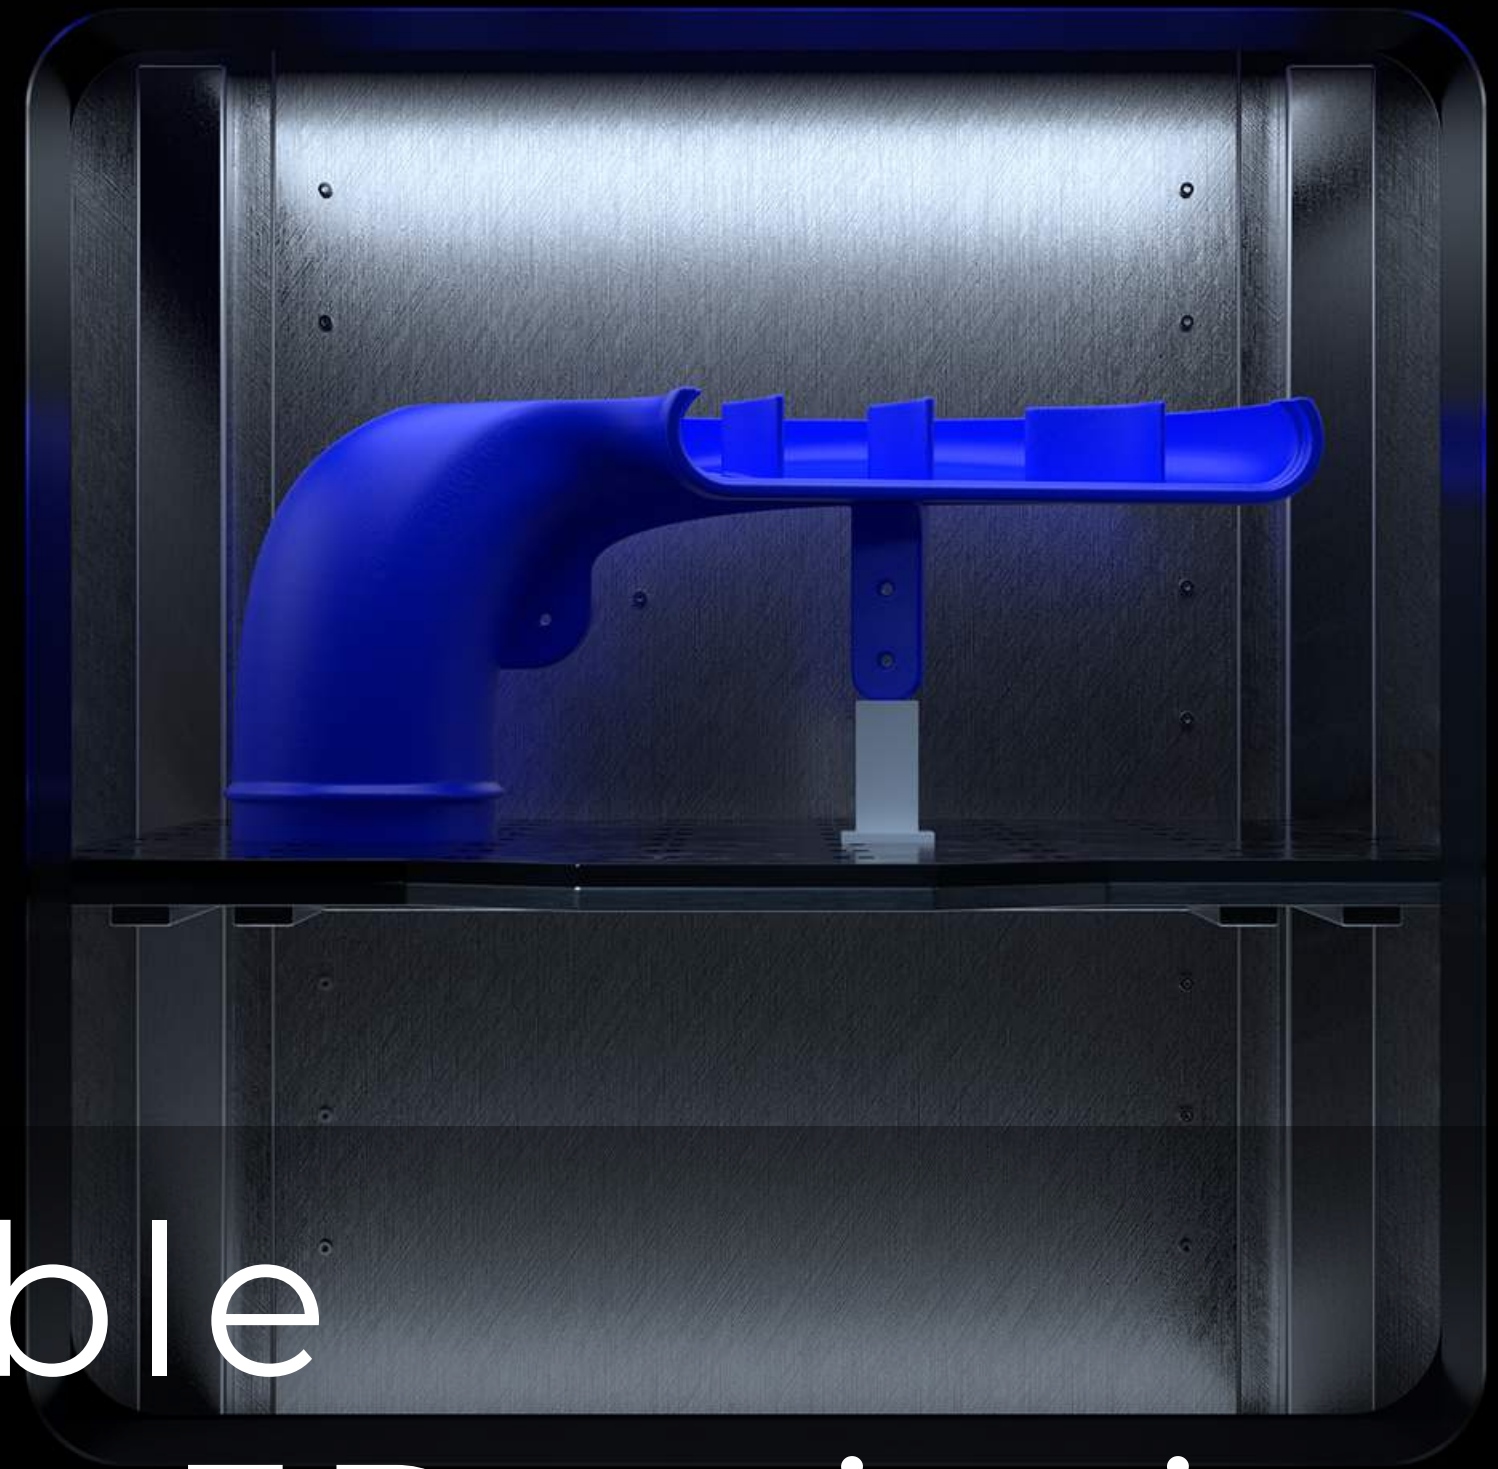

Finally. Affordable  
industrial-grade 3D printing.



# ADDITIVE MANUFACTURING FOR **METAL**

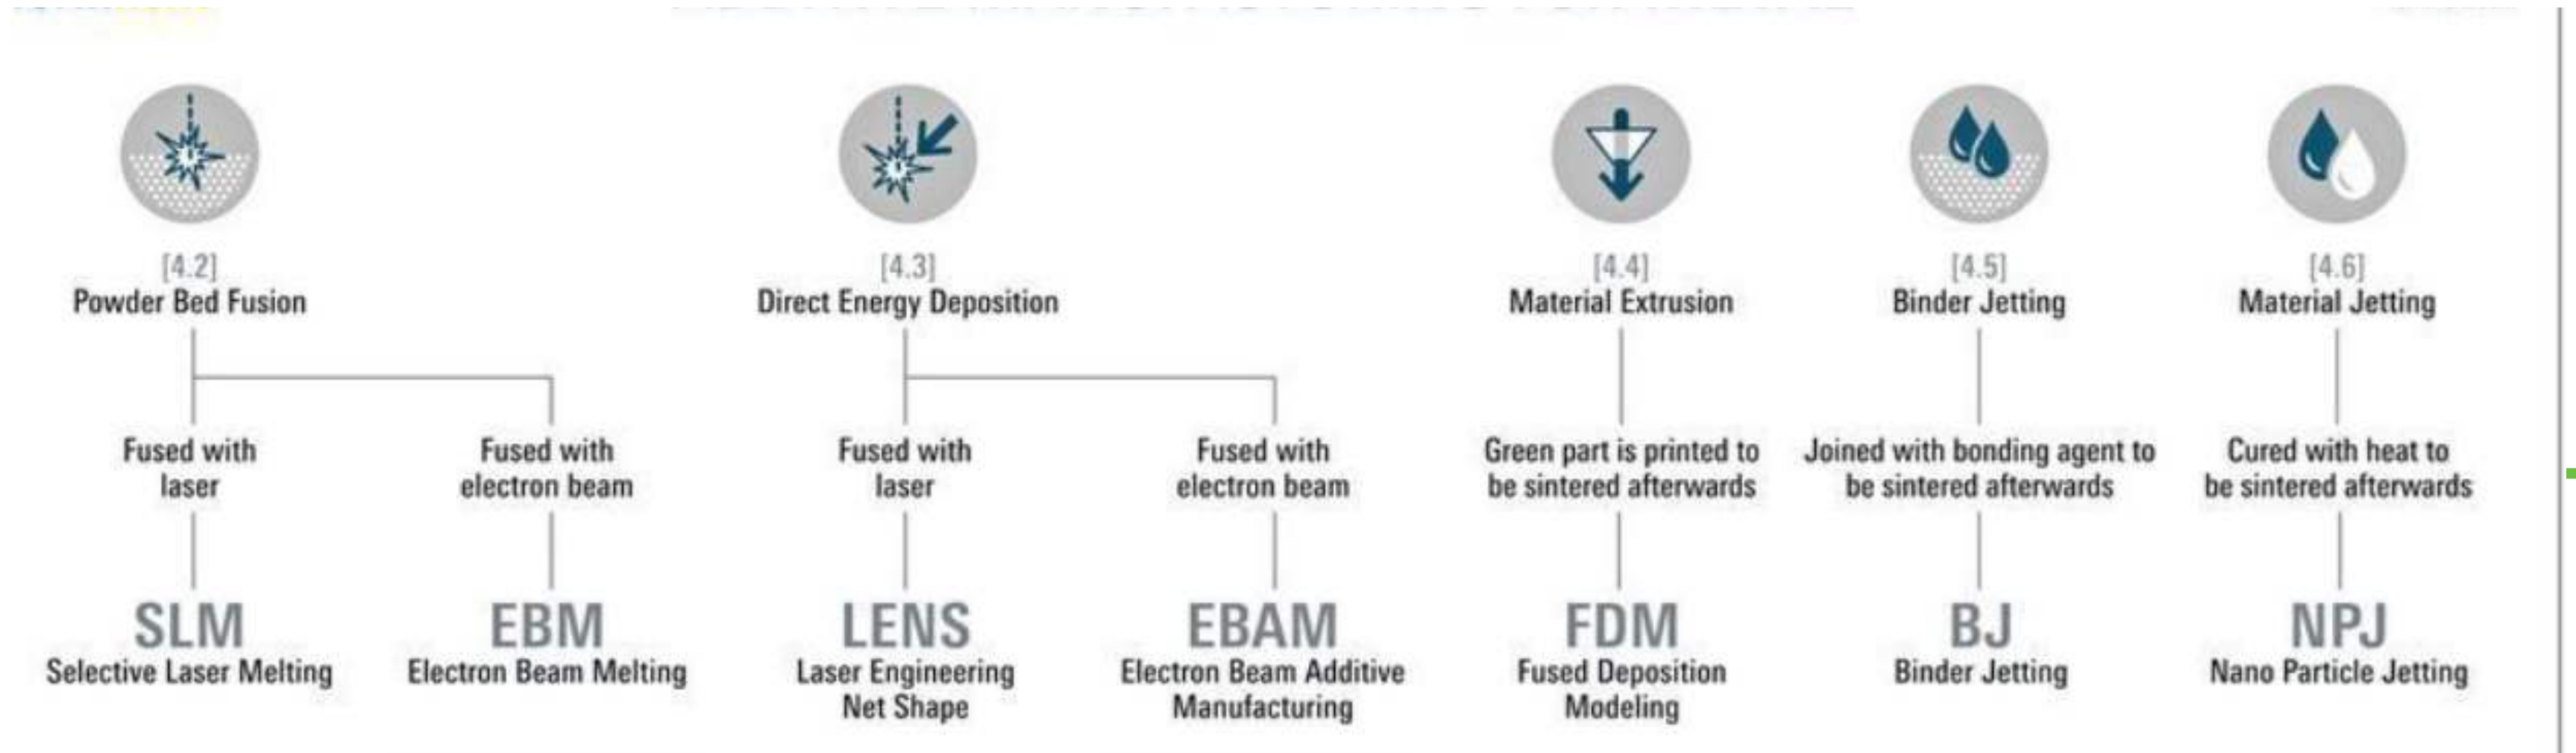





Desktop Metal is reinventing the way engineering and manufacturing teams produce metal parts - from prototyping through mass production.

>\$500M investment to bring metal AM into mass market

+180 engineers / 15 PhDs (including 4 MIT professors)

+200 patents in process



Google



KPCB

NEA



SU-PAD  
Solutions You Can Trust



# Desktop Metal Studio system





# Today's metal 3D printers are like 1970s punchcard computers



Centralized facilities, raised floors, punchcards, mag tapes, very expensive



Explosion proof room, large outdoor argon gas tanks, 480V 3 phase, respirators, specialized operators, \$600k printer + \$200k post processing equip. + \$200k facility



# The world's first office-friendly metal 3D printing system

---




**Desktop Metal™**


**SU-PAD**  
Solutions You Can Trust

# MIM VS. STUDIO SYSTEM PROCESS

MIX METAL POWDER  
+ BINDER INTO FEEDSTOCK

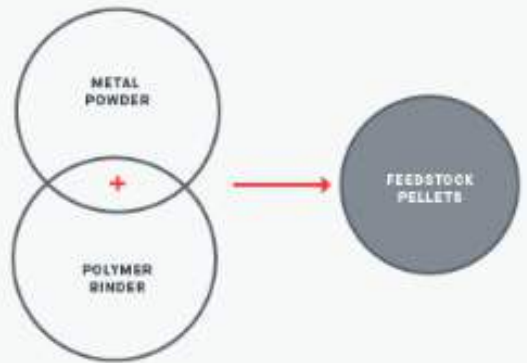

MOLD  
(REQUIRES TOOLING)

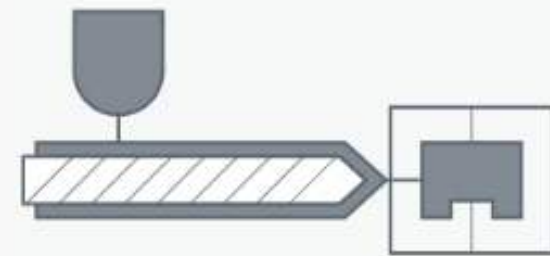


DEBIND



SINTER




1. Prep

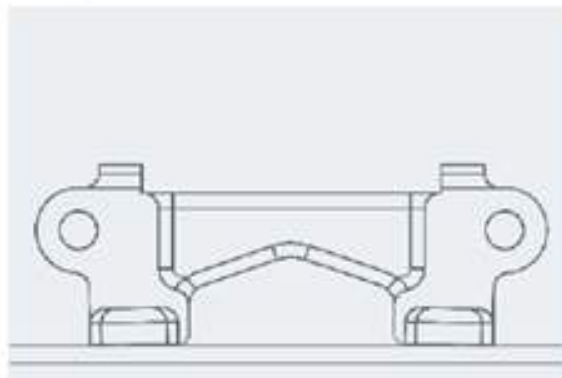



2. Print



3. Debind


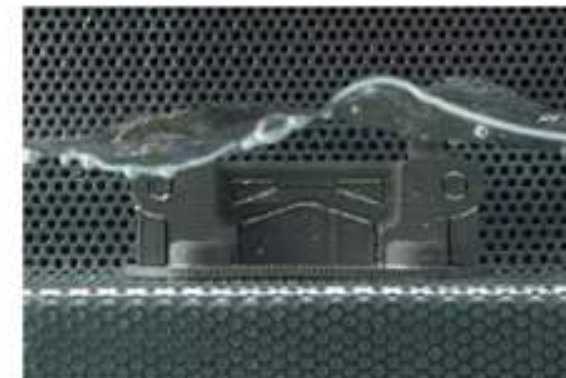


4. Sinter

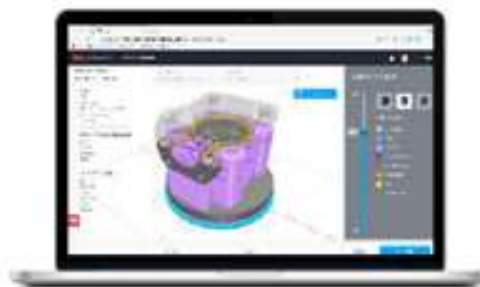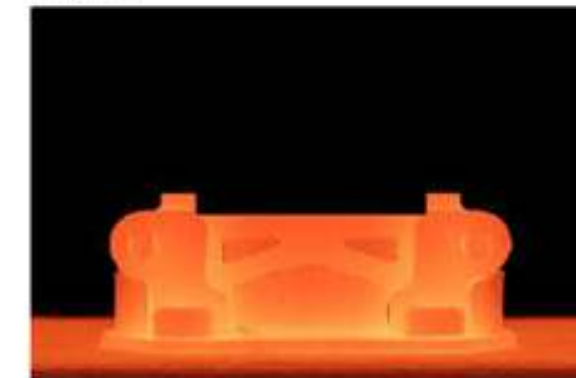



**Green parts are  
composed of  
powders fully bound  
in a polymer**

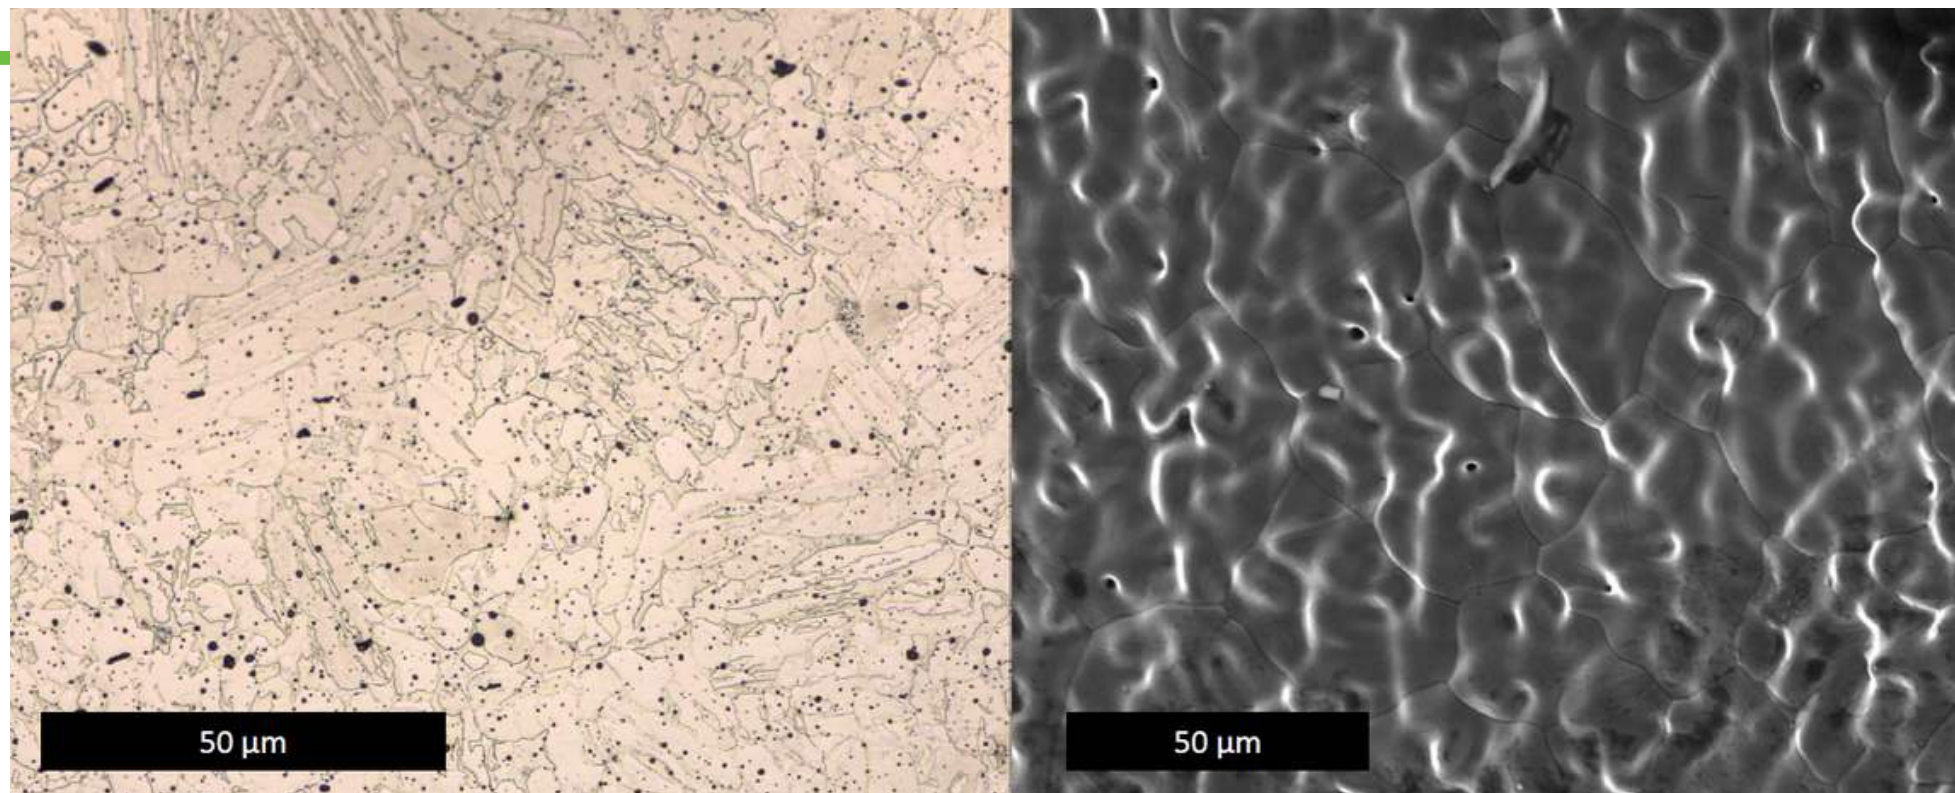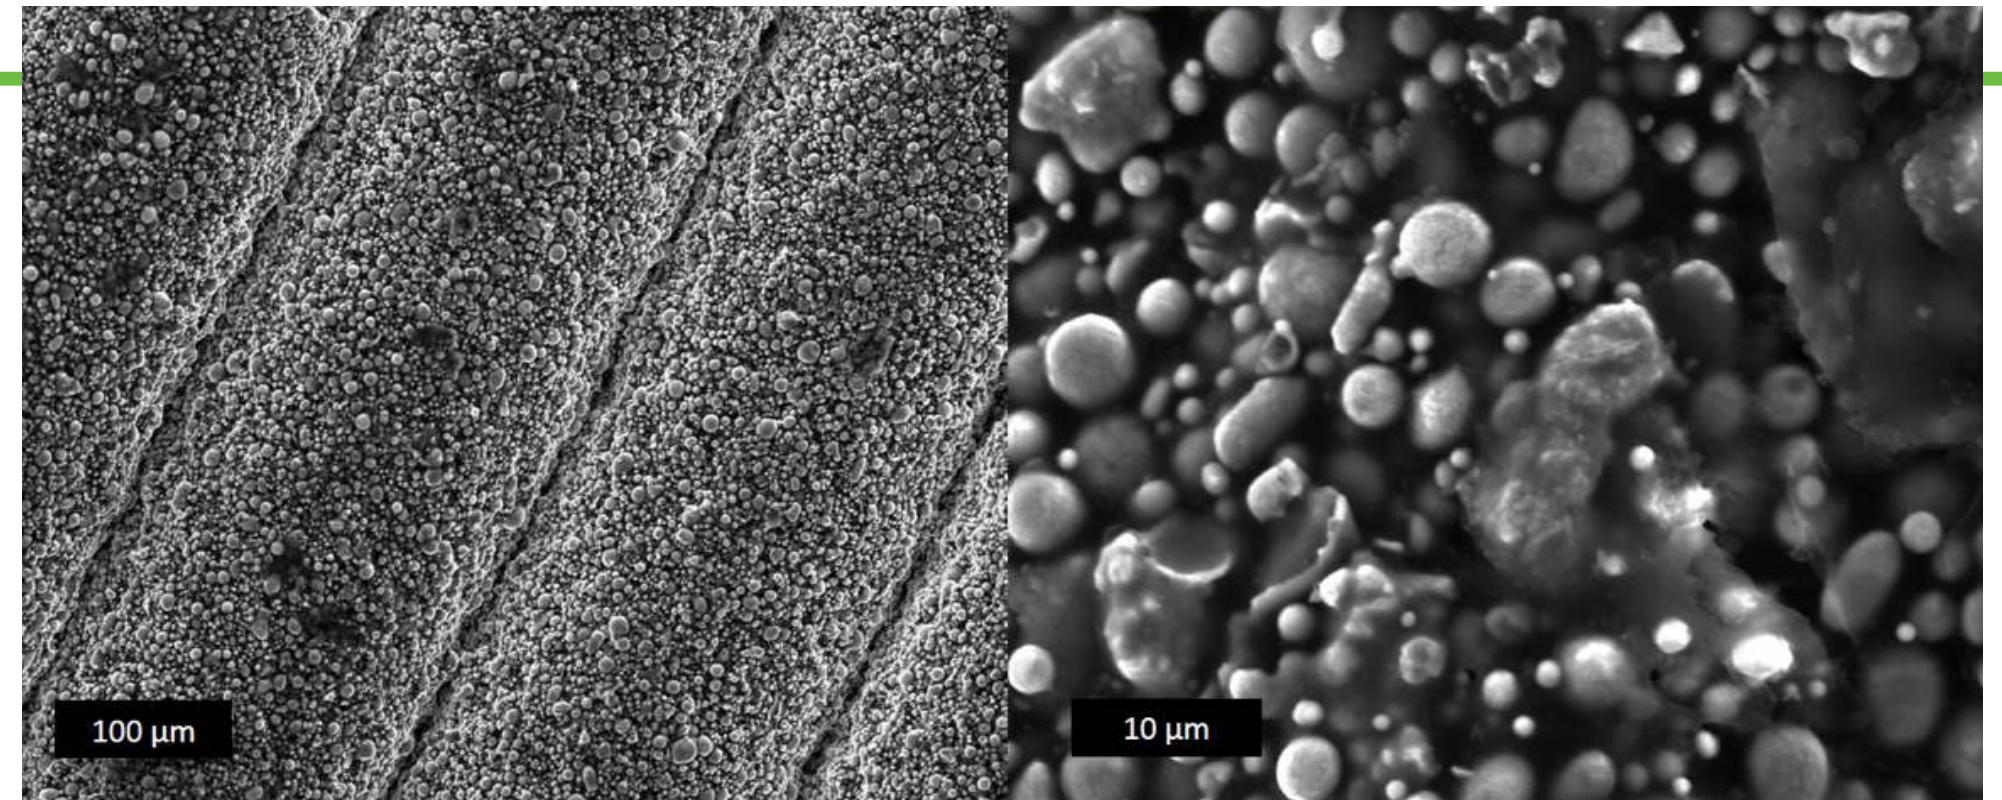

**Sintered parts are  
composed of dense,  
polymer-free metal**



# Wide range of materials



- Designed around the Metal Injection Molding (MIM) powder supply chain
- Over 30 alloys under development
- Seven alloys available


## CORE ALLOYS

- 17-4 PH STAINLESS
- 316L STAINLESS
- H13 TOOL STEEL
- 4140 CHROME MOLY
- COPPER INCONEL 625
- SUPERALLOY





## Material Properties meet or exceed material standards from ASTM/MPIF

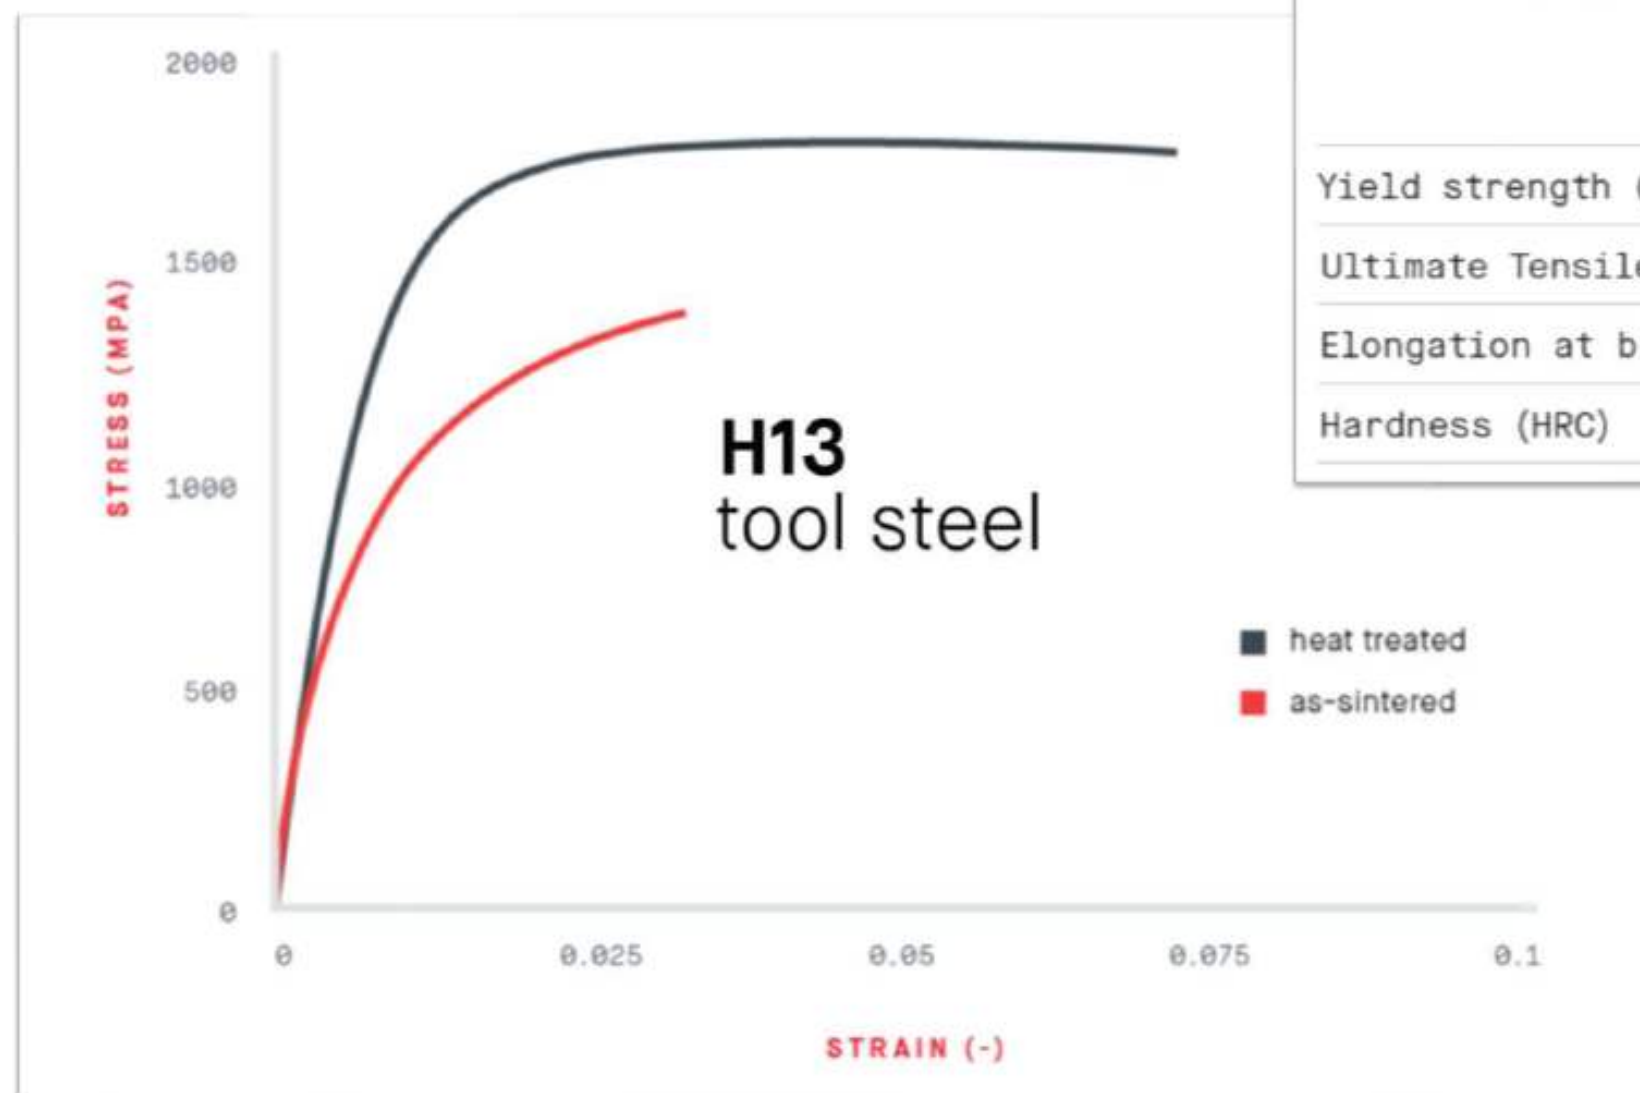

### Mechanical properties<sup>1</sup>

	standard	Studio System as-sintered	Studio System heat treated <sup>3</sup>
Yield strength (MPa)	ASTM E8 <sup>2</sup>	650	1250
Ultimate Tensile Strength (MPa)	ASTM E8 <sup>2</sup>	1325	1720
Elongation at break	ASTM E8 <sup>2</sup>	2.3%	5.8%
Hardness (HRC)	ASTM E18	35	45





**17-4 PH**  
Stainless Steel



**316L**  
Stainless Steel



**Alloy 625**  
Nickel Based Superalloy



**H13**  
Tool Steel




**4140**  
Low Alloy Steel




**Copper**  
High Purity Copper



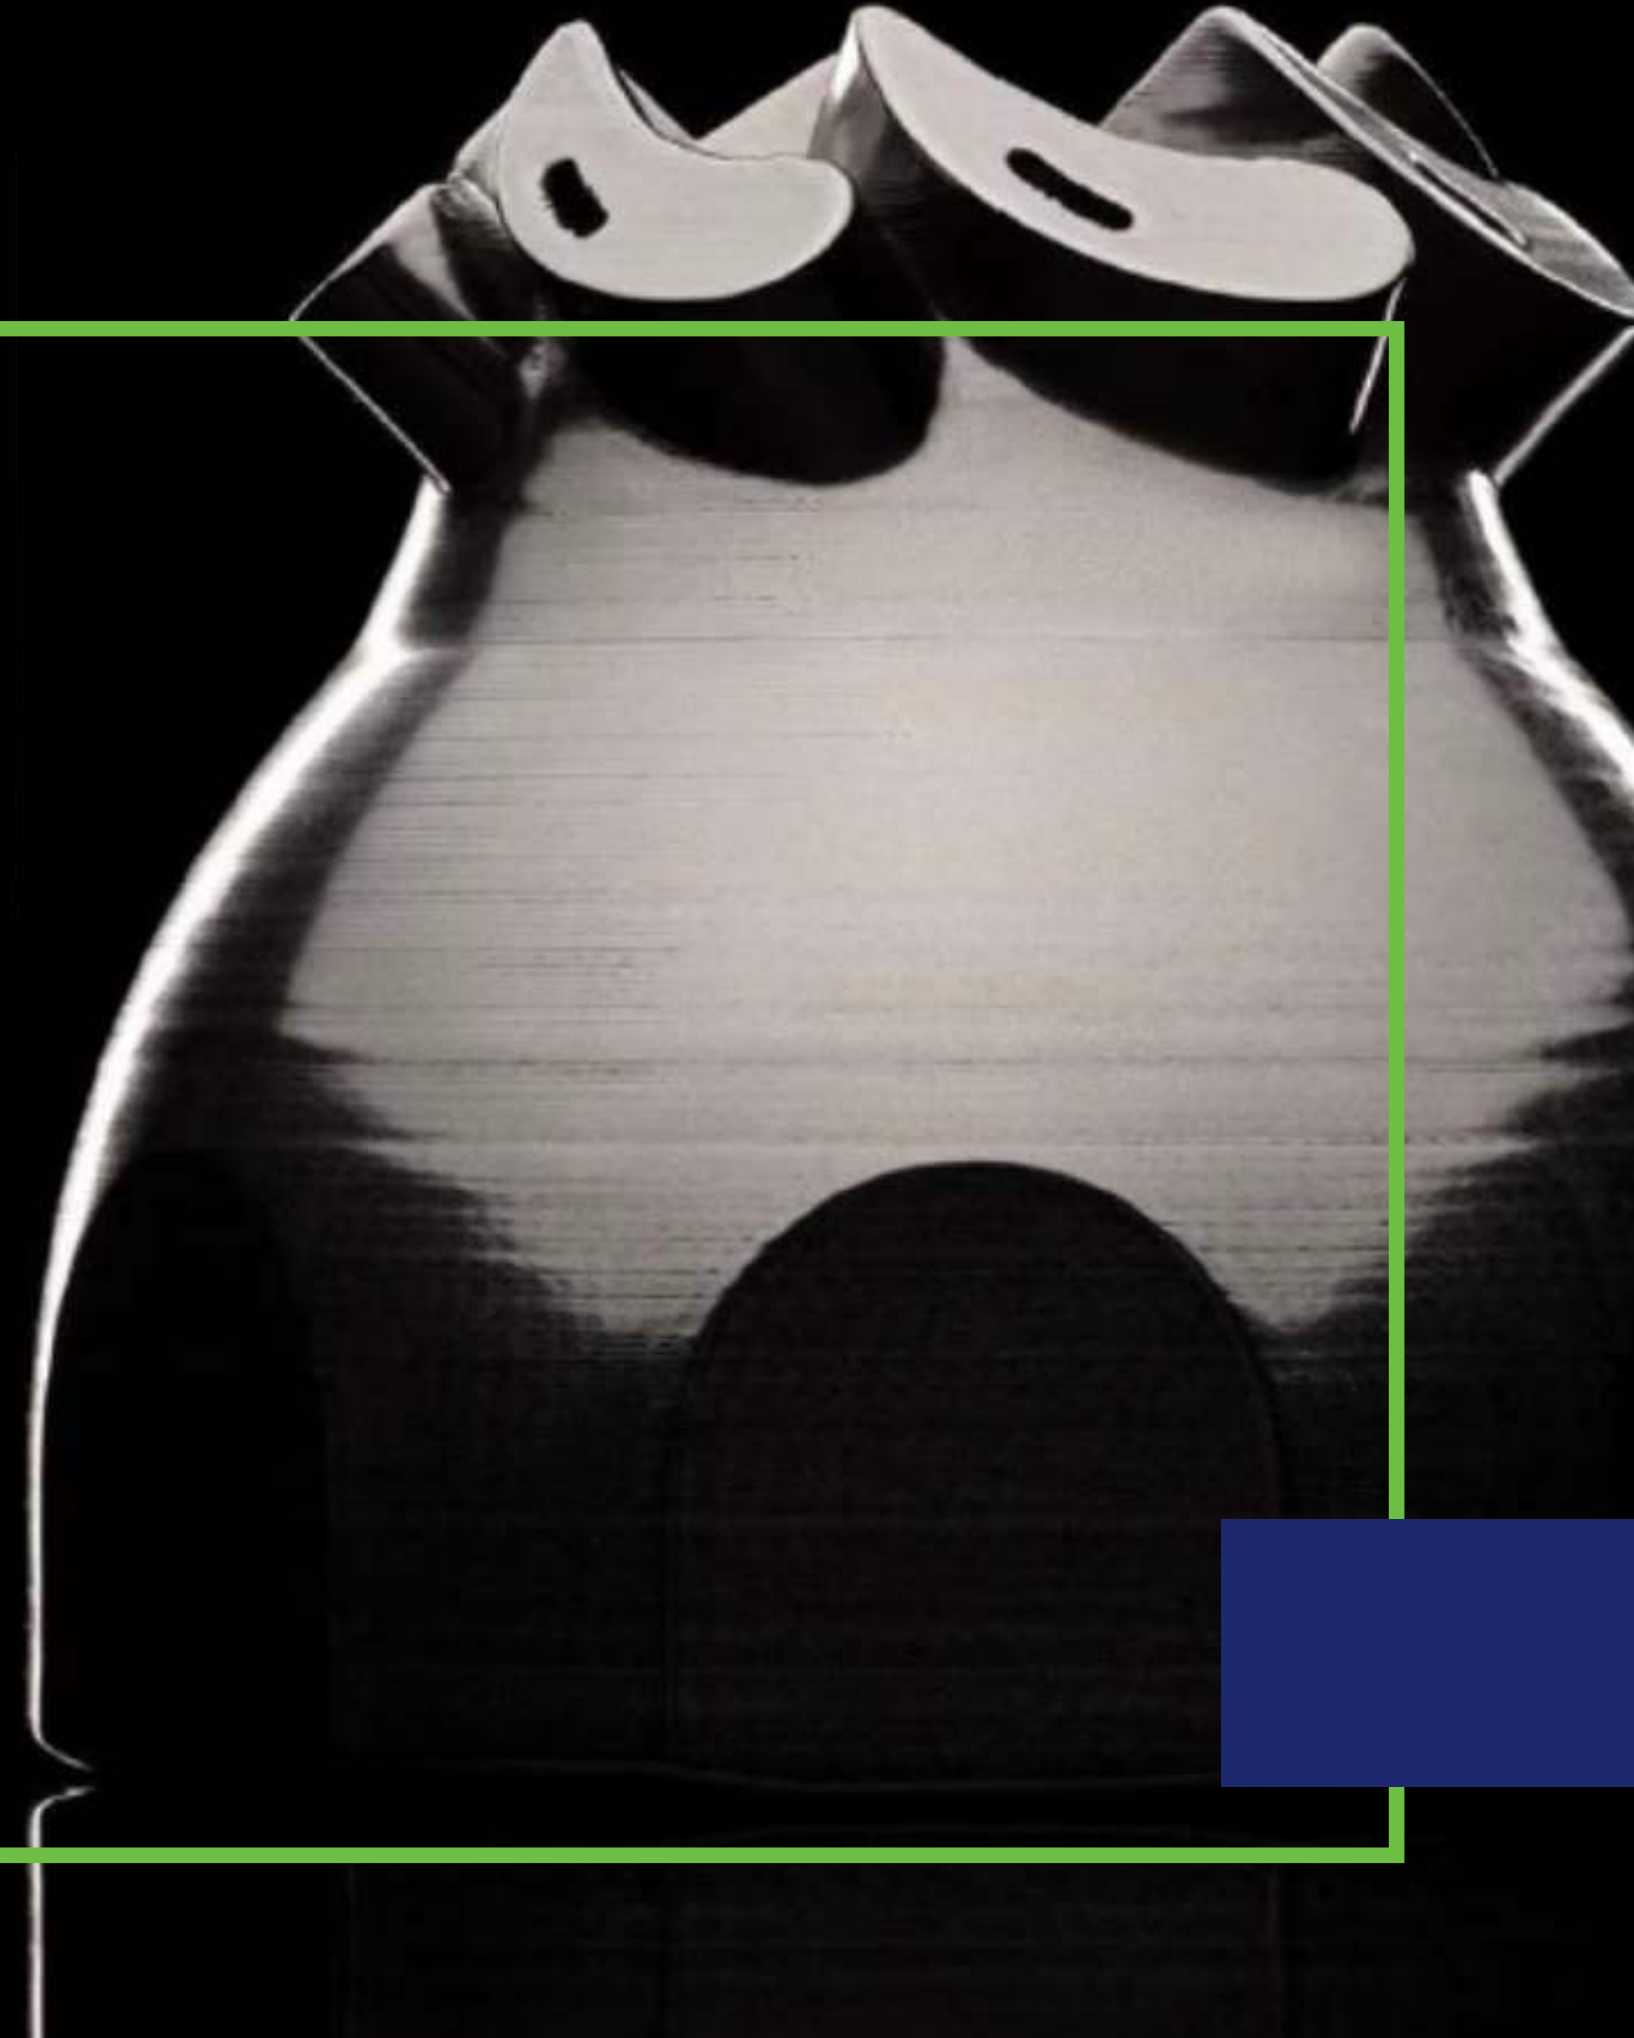



האוניברסיטה העברית בירושלים  
THE HEBREW UNIVERSITY OF JERUSALEM

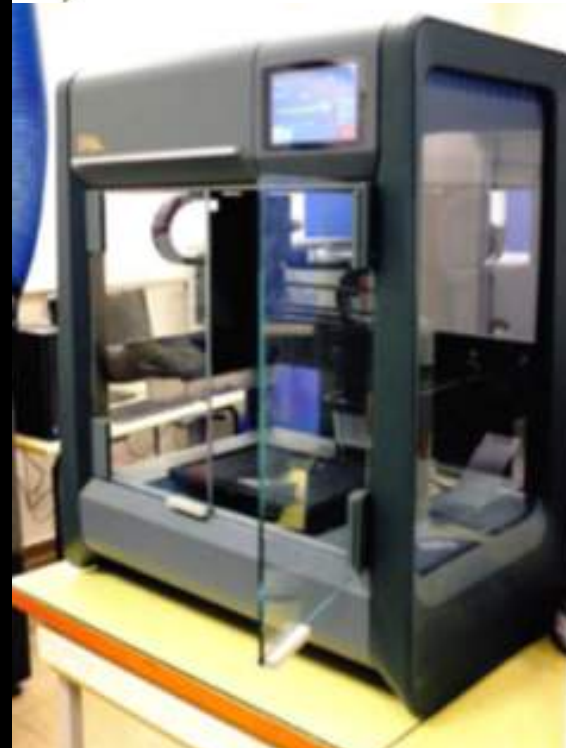



# Shop and Production System

Accessible to all

## Affordable, turnkey solution

The Shop System contains all pieces of equipment your machine shop needs to begin binder jetting — from print through sintering. And with a range of build volume configurations (4L, 8L, 12L, and 16L), the Shop System is designed to scale to your shop's throughput.

- End-to-end system (print through sinter)
- 
- Range of models: 4L, 8L, 12L, 16L build boxes
- 
- Printer starting at \$150,000; turnkey solutions starting at just over \$300,000





# PRODUCTIVITY

- Fast
- Effortless
- Flexible

# QUALITY

- High resolution parts
- Fine feature detail
- 5x redundancy




# COST & THROUGHPUT COMPARISON |

## PART EXAMPLE #1



### Output pulley

- Part volume: 3,627 mm<sup>3</sup> (0.22 in<sup>3</sup>)
- Dimensions: 41 x 26 x 8 mm (1.6 x 1.0 x 0.3 in)
- Time to market via binder jetting significantly faster than traditional manufacturing
- Traditional manufacturing tooling requires side actions / sliders - impact to part cost

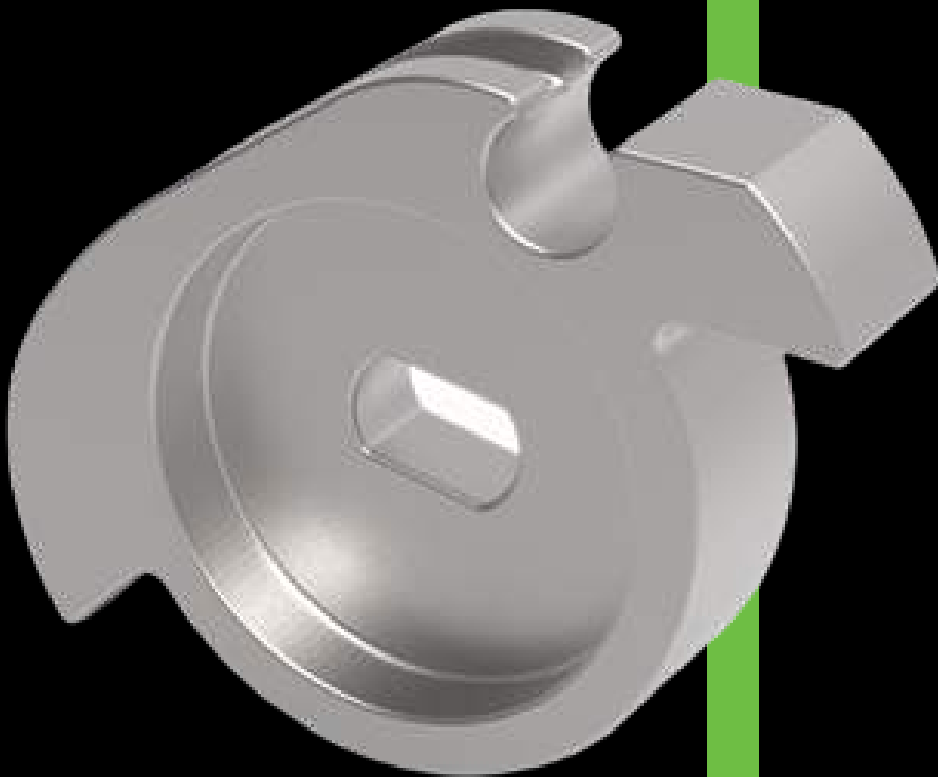


	Studio System	Shop System - 8L	Production System
Parts / year	3,120	144,199	3,423,420
Cost / part	\$33.80	\$6.75	\$0.79
Cost / cc	\$6.54	\$1.86	\$0.22



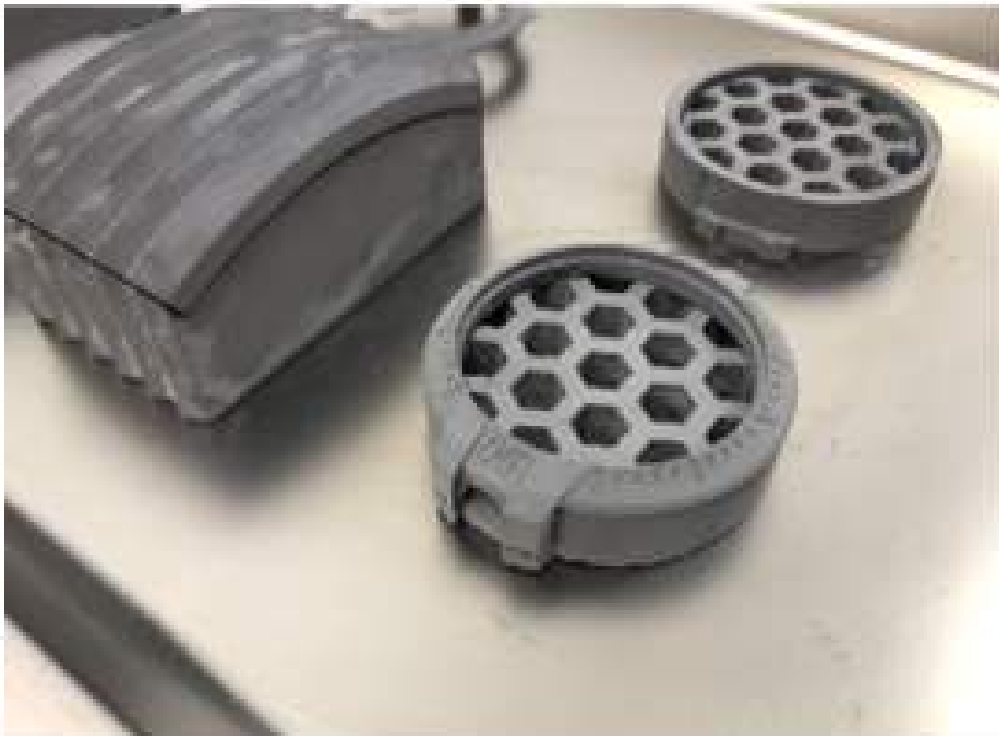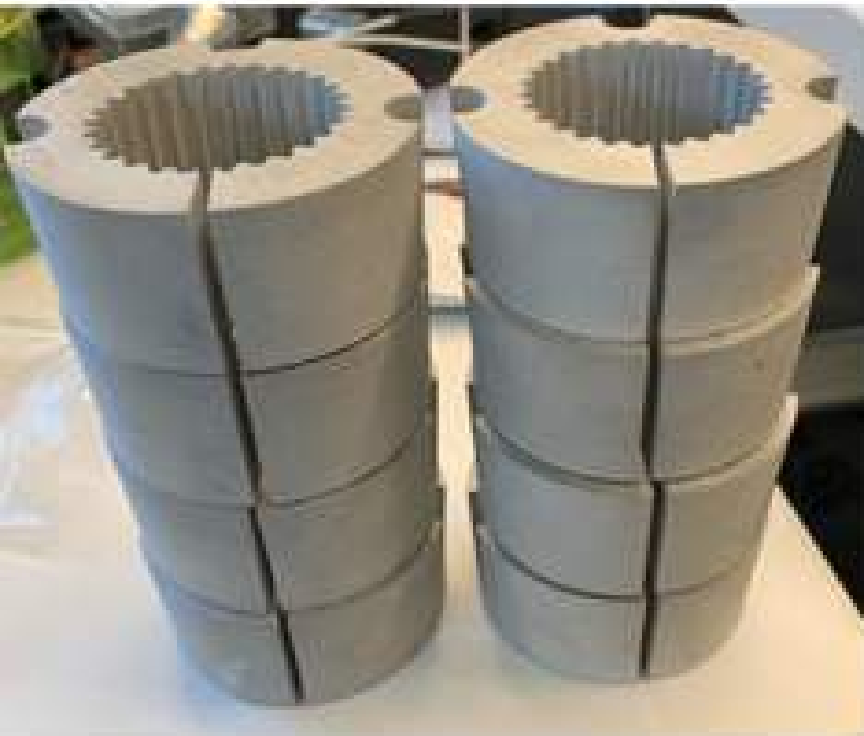



# XACT METAL

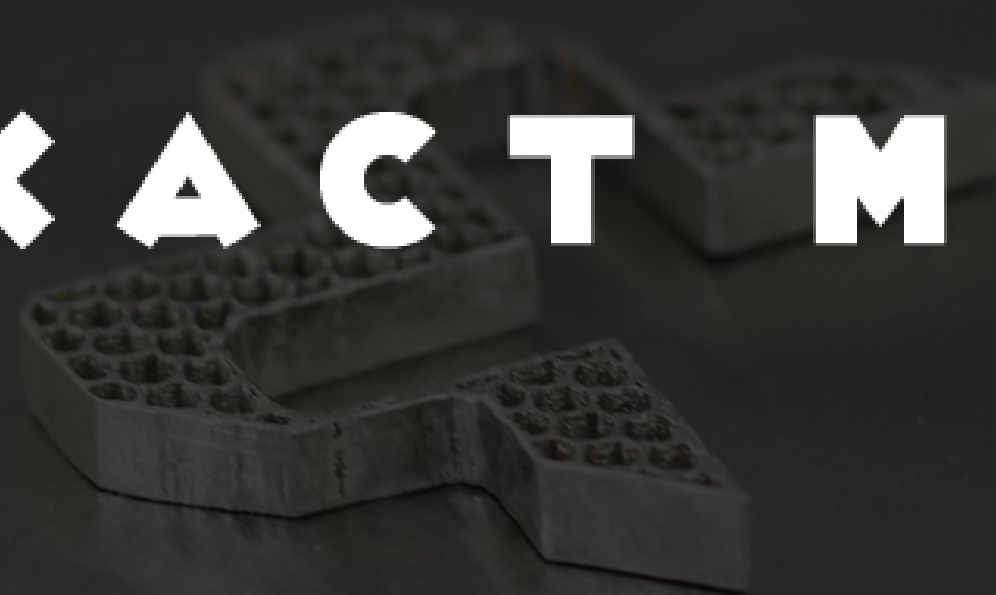





**ACCESSIBLE METAL  
POWDER BED FUSION  
3D PRINTING IS HERE.**

---

**Large build volume.  
Small footprint.  
Great performance & price.**

**Introduction to Metal Powder Bed Fusion and Xact Metal**

# FEATURE CAPABILITIES OF XACT METAL PRINTERS

- Fast enough for most applications
- User friendly intuitive modern graphical user interface (GUI)
- Fast change-over between builds
- Open powder and open architecture
- Recognized build software and powder metal suppliers

ALL FOR  
\$90,000





# METAL POWDER BED FUSION CAPABILITIES

## Typical Metals: Must Have Good Weldability

- Stainless Steels: 316L, 17-4 PH, 15-5 & 400 series
- Super Alloys: 625, 718, Cobalt Chrome F75, and other Nickel, Chromium & Molybdenum based alloys
- Tooling Steels: Maraging M300
- Bronze and Copper
- Precious Metals (Gold and Silver)
- Aluminum AlSi10Mg and Titanium Ti-64

## Mechanical Properties

Tensile value, elongation, modulus of elasticity, and hardness properties comparable to as-forged or cast properties.

## Build Tolerance


- Part Dimensions <30 mm (1.18 in.): +/- 60 microns (+/- 0.0024 in.)
- Part Dimensions >30 mm (1.18 in.): +/-0.2%

\*Tolerances of 20 to 50 microns (0.001 to 0.002 in.) achievable after process optimization for a given geometry.

## Minimum Dimensions

- Minimum practical wall thickness: 100 microns (0.004 in.)
- Minimum practical hole size: 200 microns  $\varnothing$ (0.008 in.)

# TYPICAL BENCHMARKS

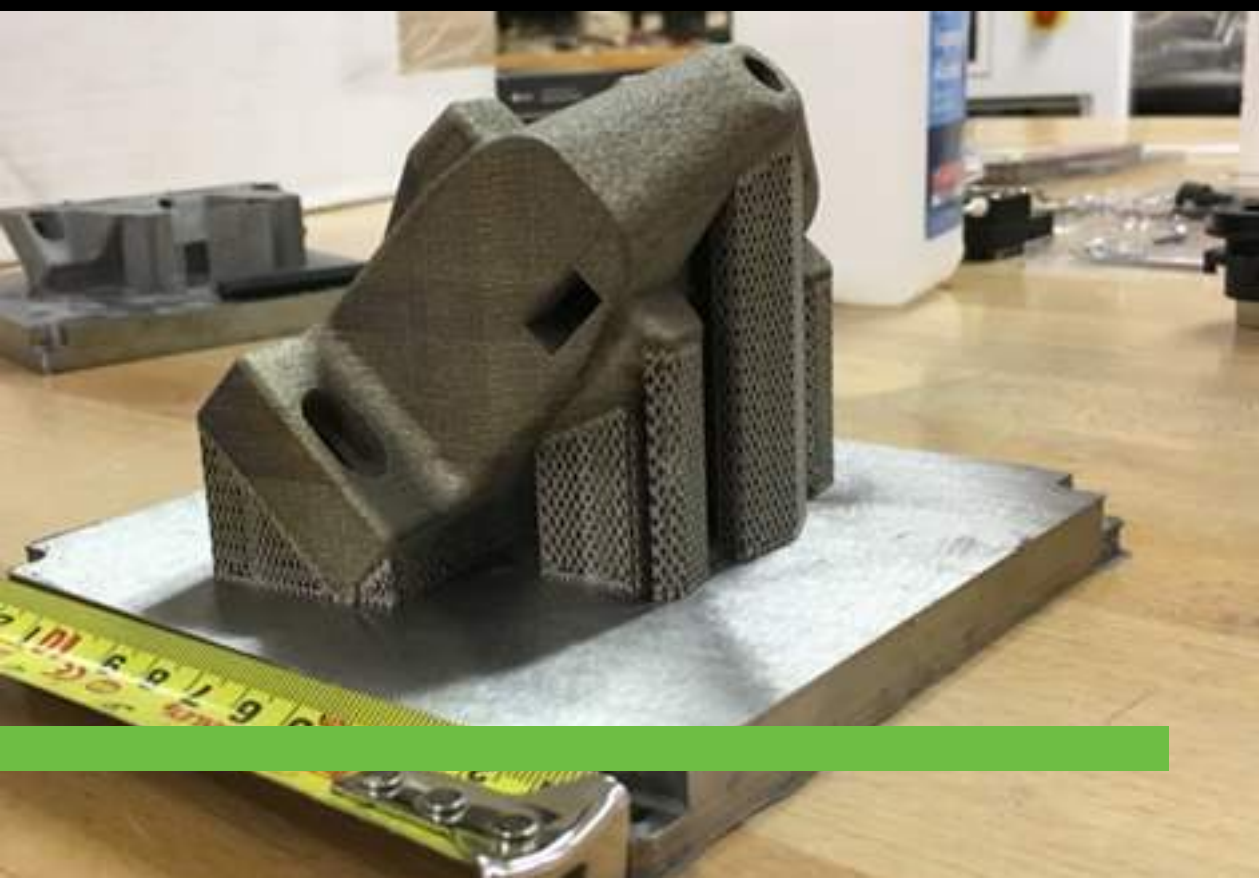





**NANO DIMENSION**

Electrifying Additive Manufacturing®





# NANODIMENSION

Electrifying Additive Manufacturing®


**Nano Dimension** is the world's leading additive electronics provider, targeting the growing demand for sophisticated electronic devices that rely on sensors, antennas, PCBs, capacitors and IC packaging

**Our additive manufacturing solutions are mission critical and economical for our customers**



# KEY TECHNOLOGIES

- Multi-layer Rigid PCB
- Side contacts
- Vertically integrated ICs
- Printed Capacitors
- RF: Antennas up to 6Ghz,  
Transmission line up to 20Ghz
- Battery Socket
- BGA/SMT mounting
- Inductor: Coils
- Sensors: torque, touch, strain gauge
- Transformers: AC2AC, AC2DC, DC2DC

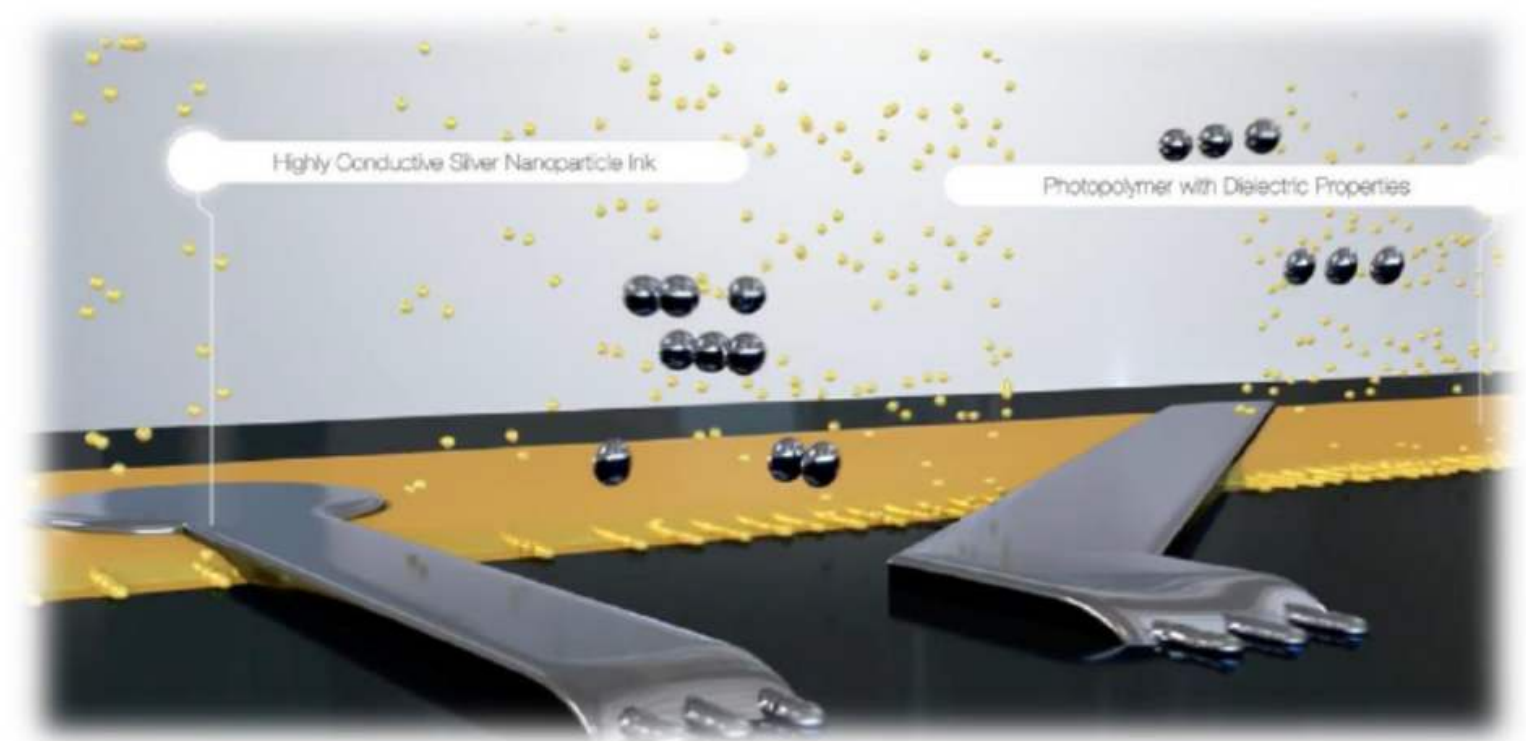

2 printheads inkjet both materials simultaneously:

- Both conductor & substrate are printed
- 100% fully additive process!



# Q&A

ממשיכים להוביל את שוק הראפיד תוך הקניית יתרון יחסי ללקוחותינו

NANODIMENSION  
Electrifying Additive Manufacturing®

 Desktop Metal™

 XACT METAL

 stratasys  
PLATINUM PARTNER





# THANK YOU

